



**FEEL THE SW
DIFFERENCE™**

FULL LINE CATALOG



CELEBRATING
41
YEARS

SW® IS ON A MISSION TO LEAD THE PERSONAL HAND PROTECTION INDUSTRY WITH SUSTAINABLE SOLUTIONS AND INNOVATION.

OUR BUSINESS



**PRIVATELY
HELD**



**WOMAN
OWNED**



**MINORITY
LED**

OUR TEAM



**GLOBAL
TEAM**

**100+
YEARS**

**INDUSTRY
EXPERIENCE**



**CALIFORNIA
BASED**

MANUFACTURING



**SELECT THIRD-PARTY
FACTORIES IN ASIA**

WORLDWIDE




**MANUFACTURING
& DISTRIBUTION**



**BEST IN CLASS
SERVICE & SUPPORT**



**DEDICATED
R&D TEAMS**



**INDUSTRY LEADING
HAND HEALTH TECHNOLOGIES**



**ENVIRONMENTALLY
FOCUSED**

OUR PRODUCT PORTFOLIO

SW Sustainability Solutions is a global leader in sustainable hand protection, combining cutting-edge glove technologies with a commitment to sustainability. SW is the only B Corp certified glove manufacturer that has targets for reducing Scope 1, 2, and 3 emissions. Our focus on R&D, skin health science, and manufacturing innovation drives the development of products that elevate worker performance across a wide range of industries—from healthcare and life sciences to automotive and manufacturing. With the largest portfolio of sustainable gloves and a bold vision for the future, SW brings a smarter, safer, and more responsible approach to hand protection. It's a difference you can feel—and a future you can trust.

SINGLE USE



MECHANICAL PROTECTION



CHEMICAL PROTECTION



SKIN HEALTH ALLIANCE APPROVED

SW® products are the first single use gloves to be SHA approved:

- skin safe products
- global standard adherence
- low environmental impact
- independent assessments
- support skin charities



CONTENTS

SW® HAND HEALTH TECHNOLOGIES	8
EnerGel®	8
pH Natural®	9
DriTek®	9
Dry Core®	9
SW® PERFORMANCE TECHNOLOGIES	10
EcoTek®	10
TracTek®	10
BioFlex360™	10
Breach Alert®	11
AxiFybr®	11
SINGLE-USE STYLES	14
TrueForm®	16
PowerForm®	26
PowerChem®	40
MegaMan®	46
Bantam™	50
MECHANICAL PROTECTION	54
GraphEx®	56
KarbonHex®	60
TotalForm®	68
CHEMICAL PROTECTION	74
NewTrile®	76
CoreSafe®	80
UNDERSTANDING CUT STANDARDS	86
UNDERSTANDING CHEMICAL STANDARDS	87
GLOVE SIZE SELECTION	88
SPECIFICATION GUIDE	89



EcoTek®

SUSTAINABLE TECHNOLOGY

Introducing SW® EcoTek Sustainable Technology

EcoTek is SW's patented, environmentally sustainable glove formula. EcoTek is manufactured sustainably and rigorously tested per the ASTM D5526 standard*.

EcoTek is useful for all glove users and industries as it is reduces emissions when incinerated.

*EcoTek gloves tested to ASTM D5526-12 Standard Test Method for Determining Anaerobic Biodegradation of Plastic Materials Under Accelerated Landfill Conditions. Results are 92.6% biodegradation in 60% solids landfill at 945 days. Future results cannot be predicted/extrapolated. If you need more information on the test reports, send email to cs@swssglobal.com.

EcoTek is available in four single-use styles.



And introducing NewTrile® with EcoTek®
Chemical-Resistant gloves
now with sustainable technology.

NEWTRILE®
featuring
EcoTek®



EnerGel[®]

Hydrates and rejuvenates hands for all-day comfort.
New patented additive clinically proven to improve hand health.

Available in these popular styles:

 **PowerForm[®]**
PF-95GW PF-12WG

 **TrueForm[®]**
TF-95LG TF-95BL

pH Natural[®]

Actively maintains skin pH at natural levels to reduce skin issues.
Proprietary coating helps keep pH levels at 5.5, reducing microbial growth.

Available in these popular styles:

 **PowerForm[®]**
PF-12WG

 **TrueForm[®]**
TF-95LG TF-95BL

Dry Core[®]

Naturally pulls sweat away from the skin for healthier hands.
Moisture-wicking system makes for a dry, comfortable environment.

Available in these popular styles:

 **PowerForm[®]**
PF-95BL

DriTek[®]

Moisture-wicking flock-lined system for drier, cooler, more comfortable hands.
Naturally manages sweat for healthier hands and easy donning and doffing.

Available in these popular styles:

 **PowerForm[®]**
PF-95GY

 **MegaMan[®]**
MM-11BK

EcoTek®

Environmentally sustainable glove formula. EcoTek is manufactured sustainably and rigorously tested per the ASTM D5526 standard*.

Available in these popular styles:



- PF-95BK PF-95GW PF-95BL
- PF-95TL PF-95GY PF-12WG
- PF-12TL PF-95OR PF-95HO
- PF-95LG PF-12OR PF-12BL



- TF-95RB TF-12LG TF-95LG
- TF-95NV TF-95BL TF-95BK



MM-11BK



PC-12WT

P-024-098-ECO-WT

*EcoTek gloves tested to ASTM D5526-12 Standard Test Method for Determining Anaerobic Biodegradation of Plastic Materials Under Accelerated Landfill Conditions. Results are 92.6% biodegradation in 60% solids landfill at 945 days. Future results cannot be predicted/extrapolated. If you need more information on the test reports, send email to cs@swssglobal.com.

Breach Alert®

Dual color, 2-ply construction technology provides immediate visual breach detection. Two distinct polymer layers add durability and dramatically improve safety.

Available in these popular styles:



- PF-95GW
- PF-12WG

TracTek®

Proprietary matrixed pattern that provides dramatic control. Designed for maximum surface-to-surface contact, providing enhanced grip in all conditions.

Available in these popular styles:



PF-95OR

AxiFybr®

Proprietary molecularly engineered yarn that dramatically enhances cut resistance. Provides the highest level cut protection with high glove comfort and dexterity.

Available in these popular styles:



- G45100 G46200
- G66200



TF-44BK

NEW

BioFlex360™

A next-generation foam nitrile coating engineered for advanced durability, grip, and precision. BioFlex360 delivers all-around performance with lightweight comfort, high dexterity, and breathable flexibility—built to support demanding tasks without compromise.

Available in these popular styles:



- TF-14BK TF-44BK

Viral Protection

SW gloves have been successfully tested against the stringent US and EU viral penetration test standards, thus giving stakeholders a high level of protection from viruses, bacteria and fungi. This reduces or eliminates the risk of exposure to biological hazards and guarantees quality of every glove produced.

- ASTM F1671 is the standard used in North America. It is a pass or fail test designed to show whether the material can protect a wearer from viruses transmitted via blood or bodily fluids.
- EN ISO 374-5 Virus standard, is the standard in Europe. It measures the ability of gloves to protect from bacteria, fungi and virus penetration using ISO 16604 as the test method.



Low Dermatitis Potential

SW® nitrile gloves have been clinically tested and proven to have reduced potential to cause skin irritation. This protection creates a cleaner glove with reduced chemical residues, removes the user's risk of allergic reactions, and will not induce contact dermatitis or Type IV hypersensitivity reaction.

- To achieve a 510K Certification, a medical grade glove must meet ASTM and FDA standards.
- Tested by an FDA registered and certified US laboratory and headed by a board-certified dermatologist. Testing was conducted on a minimum of 200 human subjects, to qualify for the Low Dermatitis Claim.



SINGLE-USE STYLES

For decades, SW has been the premier manufacturer of single-use performance products. With a relentless focus on new manufacturing technologies and materials that drive innovation, SW single-use styles continuously push the boundaries of quality and worker-enhancing performance that fuels business success.



8 Values of Quality

The 8 Values of Quality is the standard that we at SW hold for ourselves. It represents, to the core, how we manufacture our products, interact with stakeholders, and operate as a company.

You can learn more about SW's compliance and ethics on our website at [swsafety.com](https://www.swsafety.com).





QUALITY. COMFORT. DEXTERITY.

TrueForm® is made for those who rely on daily hand protection to provide ease of use and high dexterity. With TrueForm, quality is designed into every style using exacting manufacturing processes for tip-to-cuff consistency, glove after glove.



Feel the
difference.™

FIRST HAND

This new nitrile exam glove is destined to be the workhorse of any professional practice or facility. When your day-to-day depends on consistent quality protection, this is the glove to reach for to always deliver on expectations, every time.



RIGHT WEIGHT
At 5 grams and 3.1 mil thickness, it's not too heavy and not too light.

SAME SAME
Manufactured to be consistent and flat packed so each one dispenses with the same quality feel.

TF

TF-95RB

WEIGHT	LENGTH	THICKNESS	FEATURES	COLOR
 5.0g (large size)	 9.5"	 4.7 mil 3.1 mil	EcoTek®	 ROYAL BLUE

EcoTek

EXTENDED PROTECTION

These gloves provide tactile sensitivity and great grip with an extended cuff for added protection, so you can work in comfort and confidence.



SAFETY
Tested for use with harmful chemotherapy drugs

QUALITY
100% air inspected, consistent thickness tip to cuff

TF

TF-12LG

WEIGHT	LENGTH	THICKNESS	FEATURES	COLOR
 7.5g (large size)	 12.0"	 5.9 mil 4.9 mil	EcoTek® Clean Washed Air Inspected	 LIGHT GREEN

EcoTek



Models & Ordering Information

TF-065-095NT

POWDER-FREE LATEX EXAMINATION GLOVES

- Natural latex provides advanced chemical protection
- Tear-resistant beaded cuff for easy donning
- Optimal thickness for durability and tactile sensitivity
- Exceeds 1.5 AQL laboratory standards



ORDERING INFORMATION

L006201	XS: 5.5-6
L006202	S: 6.5-7
L006203	M: 7.5-8
L006204	L: 8.5-9

100 Gloves/Box 1000/Case

PHYSICAL PROPERTIES

Outer Surface	Fully Textured
Cuff Finish	Beaded
Fit Type	Ambidextrous
Length	9.5" / 242mm
Finger Thickness	5.5mil / 0.14mm
Palm Thickness	4.7mil / 0.12mm
Tensile Strength Before Aging	19 MPa
Tensile Strength After Aging	16 MPa
Elongation Before Aging	850%
Elongation After Aging	750%
AQL	1.5



STANDARDS AND COMPLIANCE

EN 420-2003
EN 455:2000-2015
ASTM D3578
ASTM F1671-97
FDA 21 CFR 177.2600

TF-95RB

EVERYDAY NITRILE EXAM GLOVES WITH ECOTEK®

- The new lighter standard for everyday exam use
- Consistent quality glove to glove
- Beaded cuff allows easy donning and doffing



ORDERING INFORMATION

N301341	XS: 5.5-6
N301342	S: 6.5-7
N301343	M: 7.5-8
N301344	L: 8.5-9
N301345	XL: 9.5-10

100 Gloves/Box 1000/Case

PHYSICAL PROPERTIES

Inner Surface	Smooth
Outer Surface	Textured
Cuff Finish	Beaded
Fit Type	Ambidextrous
Length	9.5" / 242mm
Finger Thickness	4.7mil / 0.12mm
Palm Thickness	3.1mil / 0.08mm
Tensile Strength Before Aging	14 MPa
Tensile Strength After Aging	14 MPa
Elongation Before Aging	500%
Elongation After Aging	400%
AQL	1.5




STANDARDS AND COMPLIANCE

EN ISO 21420:2020
EN 455:2000-2015
ASTM D6319-19
ASTM D6978-05 (2019)
ASTM F1671-13
ASTM F739-12
Reach EU 1907/2006
EU 2016/425
ANSI/ISEA 105-2016
CAT III Complex Design
FDA 21 CFR 177.2600

TF-12LG

EXTENDED CUFF NITRILE EXAM GLOVES WITH ECOTEK®

- Extra length cuff provides additional protection
- Tested for use with harmful chemotherapy drugs
- Lightly textured surface delivers added grip
- 100% air inspected / consistent thickness tip to cuff

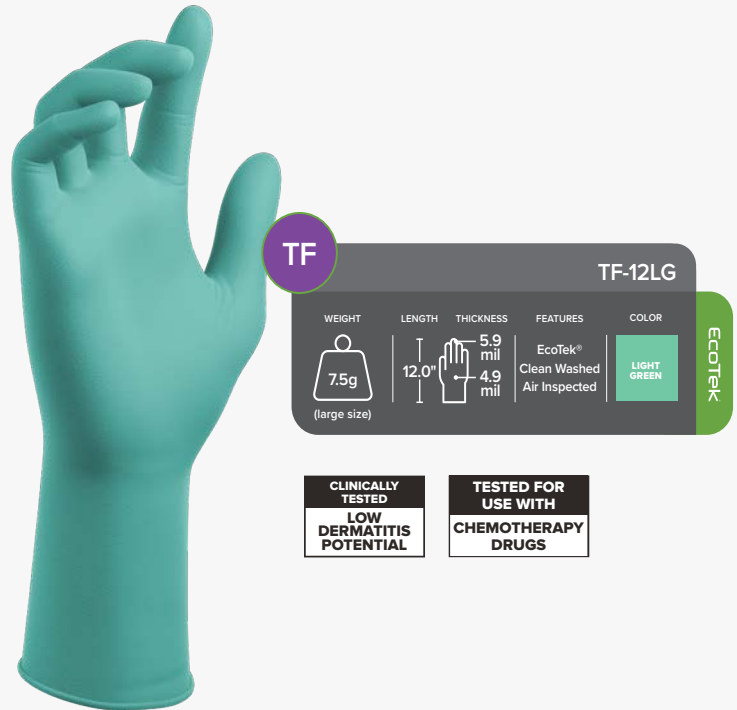

ORDERING INFORMATION

N027401	XS: 5.5-6
N027402	S: 6.5-7
N027403	M: 7.5-8
N027404	L: 8.5-9
N027405	XL: 9.5-10
N027406	*2XL: 10.5-11

100 Gloves/Box 1000/Case
*90/Box, 900/Case

PHYSICAL PROPERTIES

Inner Surface	Smooth
Outer Surface	Fully Textured
Cuff Finish	Beaded
Fit Type	Ambidextrous
Length	12.0" / 305 mm
Finger Thickness	5.9mil / 0.15mm
Palm Thickness	4.9mil / 0.12mm
Tensile Strength Before Aging	21 MPa
Tensile Strength After Aging	19 MPa
Elongation Before Aging	580%
Elongation After Aging	550%
AQL	1.5



STANDARDS AND COMPLIANCE

EN ISO 21420:2020
EN 455:2000-2015
ASTM D6319-19
ASTM D6978-05 (2019)
ASTM F1671-13
ASTM F739-12
Reach EU 1907/2006
EU 2016/425
CAT III Complex Design
FDA 21 CFR 177.2600



Models & Ordering Information

TF-95LG

NITRILE EXAM GLOVES WITH ECOTEK®,
pH NATURAL®, & ENERGEL®

- EcoTek® Sustainable Technology
- Proprietary pH Natural® coating supports the skin’s natural pH to help discourage microbial growth that can lead to infection
- EnerGel® Hand Conditioning Technology clinically proven to hydrate and soothe skin
- Flat Stack Dispensing



TF

TF-95LG

WEIGHT	LENGTH	THICKNESS	FEATURES	COLOR
4.8g (large size)	9.5"	4.0 mil 3.6 mil	EcoTek® pH Natural® EnerGel®	LIGHT GREEN

ECOTEK

CLINICALLY TESTED

LOW DERMATITIS POTENTIAL

TF-95NV

EVERYDAY NITRILE EXAM GLOVES WITH
ECOTEK®

- EcoTek® Sustainable Technology
- Finger textured surface for wet and dry grip
- The right weight for resiliency and dexterity
- Tear-resistant beaded cuff for easy donning
- Silicone-free eliminates risk of contamination
- Exceeds 1.5 AQL standards providing consistent reliability and reduced risk of defects



TF

TF-95NV

WEIGHT	LENGTH	THICKNESS	FEATURES	COLOR
3.8g (large size)	9.5"	3.5 mil 2.4 mil	EcoTek®	ROYAL BLUE

ECOTEK

CLINICALLY TESTED

LOW DERMATITIS POTENTIAL

TESTED FOR USE WITH

CHEMOTHERAPY DRUGS

TF-95BK

NITRILE EXAM GLOVES WITH ECOTEK®

- EcoTek® Sustainable Technology
- Finger textured surface for wet and dry grip
- The right weight for resiliency and dexterity
- Tear-resistant beaded cuff for easy donning
- Silicone-free eliminates risk of contamination
- Exceeds 1.5 AQL standards providing consistent reliability and reduced risk of defects
- Comfortable Ergonomic Fit



TF

TF-95BK

WEIGHT	LENGTH	THICKNESS	FEATURES	COLOR
3.8g (large size)	9.5"	3.5 mil 2.4 mil	EcoTek®	BLACK

ECOTEK

CLINICALLY TESTED

LOW DERMATITIS POTENTIAL

ORDERING INFORMATION

N028401	XS: 5.5-6
N028402	S: 6.5-7
N028403	M: 7.5-8
N028404	L: 8.5-9
N028405	XL: 9.5-10

100 Gloves/Box 1000/Case

PHYSICAL PROPERTIES

Inner Surface	EnerGel®
Outer Surface	Finger Textured
Cuff Finish	Beaded
Fit Type	Ambidextrous
Length	9.5" 242mm
Finger Thickness	4.0mil 0.10mm
Palm Thickness	3.6mil 0.09mm
Tensile Strength Before Aging	22 MPA
Tensile Strength After Aging	20 MPA
Elongation Before Aging	560%
Elongation After Aging	550%
AQL	1.5



STANDARDS AND COMPLIANCE

EN ISO 21420:2020
EN 455:2000-2015
ASTM D6319-19
ASTM F1671-13
ASTM F739-12
Reach EU 1907/2006
EU 2016/425
CAT III Complex Design
FDA 21 CFR 177.2600

ORDERING INFORMATION

N191341	XS: 5.5-6
N191342	S: 6.5-7
N191343	M: 7.5-8
N191344	L: 8.5-9
N191345	XL: 9.5-10
N191346	2XL: 10.5-11

200 Gloves/Box 2000/Case

PHYSICAL PROPERTIES

Inner Surface	Smooth
Outer Surface	Finger Textured
Cuff Finish	Beaded
Fit Type	Ambidextrous
Length	9.5" / 242mm
Finger Thickness	3.5mil / 0.08mm
Palm Thickness	2.4mil / 0.06mm
Tensile Strength Before Aging	14 MPa
Tensile Strength After Aging	14 MPa
Elongation Before Aging	500%
Elongation After Aging	400%
AQL	1.5



STANDARDS AND COMPLIANCE

EN ISO 21420:2020
EN 455:2000-2015
ASTM D6319
Reach EU 1907/2006
EU 2016/425

ORDERING INFORMATION

N191881	XS: 5.5-6
N191882	S: 6.5-7
N191883	M: 7.5-8
N191884	L: 8.5-9
N191885	XL: 9.5-10
N191886	2XL: 10.5-11

200 Gloves/Box 2000/Case

PHYSICAL PROPERTIES

Inner Surface	Smooth
Outer Surface	Finger Textured
Cuff Finish	Beaded
Fit Type	Ambidextrous
Length	9.5" / 242 mm
Finger Thickness	3.5mil / 0.08mm
Palm Thickness	2.4mil / 0.06mm
Tensile Strength Before Aging	14 MPa
Tensile Strength After Aging	14 MPa
Elongation Before Aging	500%
Elongation After Aging	400%
AQL	1.5



STANDARDS AND COMPLIANCE

EN ISO 21420:2020
EN 455:2000-2015
ASTM D6319
Reach EU 1907/2006
EU 2016/425




Models & Ordering Information

TF-95BL

NITRILE EXAM GLOVES WITH ECOTEK®,
pH NATURAL®, & ENERGEL®

- EcoTek® Sustainable Technology
- Proprietary pH Natural® coating supports the skin's natural pH to help discourage microbial growth that can lead to infection
- EnerGel® Hand Conditioning Technology clinically proven to hydrate and soothe skin
- Silicone-free for critical environments
- Tear-resistant beaded cuff eases donning

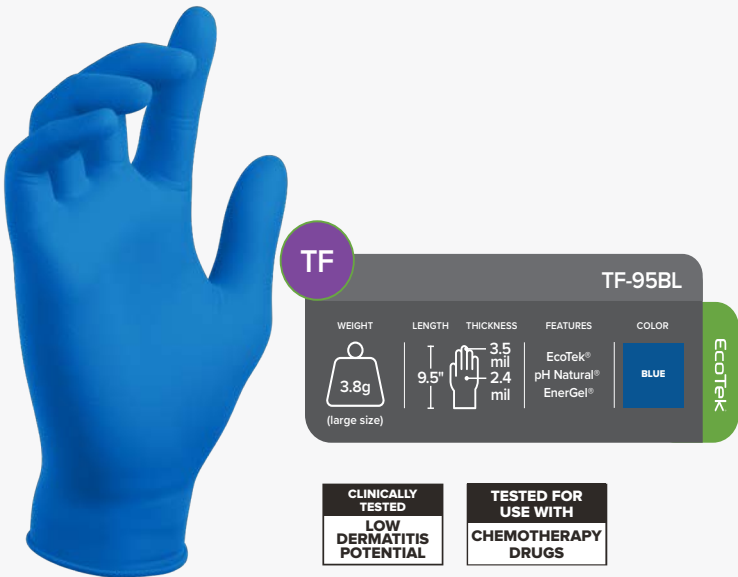

ORDERING INFORMATION	
N091341	XS: 5.5-6
N091342	S: 6.5-7
N091343	M: 7.5-8
N091344	L: 8.5-9
N091345	XL: 9.5-10
N091346*	2XL: 10.5-11
250 Gloves/Box 2500/Case *225/Box, 2250/Case	

PHYSICAL PROPERTIES	
Inner Surface	EnerGel®
Outer Surface	Finger Textured
Cuff Finish	Beaded
Fit Type	Ambidextrous
Length	9.5" 242mm
Finger Thickness	3.5mil 0.08mm
Palm Thickness	2.4mil 0.06mm
Tensile Strength Before Aging	14 MPA
Tensile Strength After Aging	14 MPA
Elongation Before Aging	500%
Elongation After Aging	400%
AQL	1.5

STANDARDS AND COMPLIANCE
EN ISO 21420:2020
EN 455:2000-2015
ASTM D6319
Reach EU 1907/2006
EU 2016/425



DESIGNED. ENGINEERED. PERFORMANCE.

PowerForm® brings new hand protection technologies to workplace performance. From sweat management to enhanced grip design, PowerForm features enable workers to execute tasks with more confidence. PowerForm focuses on functional advancements to optimize on-the-job performance every day.



A TRIPLE FEATURE

Made for those high-risk environments where, if there is a glove breach, you need to know now. The white interior of this dual layer glove provides an immediate sign of any puncture or compromise. In addition, EnerGel rejuvenates hands for long-term wear and EcoTek.



PF-95GW

EnerGel®

EcoTek®

Breach Alert®



SEE IT

Dual-layer Breach Alert® provides extra durability and security you can see.



AHHH

EnerGel® hand rejuvenating technology hydrates and soothes for added comfort and hand health.

PF-95GW					EcoTek
WEIGHT	LENGTH	THICKNESS	FEATURES	COLOR	
 6.5g (large size)	 9.5"	 5.9 mil 4.9 mil	EnerGel® Breach Alert® EcoTek®		



GOOD BYE

EcoTek® sustainable technology

SWEAT PROBLEMS SOLVED

Work in comfort with DriTek, built-in moisture absorbing technology that keeps hands dryer and cooler.



PF-95GY

DriTek®

EcoTek®



HANG ON

Fully textured for secure grip

NO SWEAT, IT'S DRITEK®

Moisture absorbent lining keeps hands dry, cool and healthy.

PF-95GY					EcoTek
WEIGHT	LENGTH	THICKNESS	FEATURES	COLOR	
 8.8g (large size)	 9.5"	 8.2 mil 6.2 mil	DriTek® EcoTek®		



GOOD BYE

EcoTek® sustainable technology

Models & Ordering Information

PF-95HO

NITRILE EXAM GLOVES WITH ECOTEK®

- EcoTek® Sustainable Technology
- Hi-Vis orange color
- Silicone-free eliminates risk of contamination
- Exceeds 1.5 AQL standards providing consistent reliability and reduced risk of defects
- Comfortable Ergonomic Fit
- Beaded cuff allows easy donning and doffing



PF-95LG

NITRILE EXAM GLOVES WITH ECOTEK®

- EcoTek® Sustainable Technology*
- Silicone-free eliminates risk of contamination
- Exceeds 1.5 AQL standards providing consistent reliability and reduced risk of defects
- Comfortable Ergonomic Fit



PF-95BK

NITRILE EXAM GLOVES WITH ECOTEK®

- Lightly textured surface delivers added grip
- Beaded cuff allows easy donning and doffing
- 100% air inspected / consistent thickness tip to cuff
- EcoTek sustainable technology



ORDERING INFORMATION

N200752	S: 6.5-7
N200753	M: 7.5-8
N200754	L: 8.5-9
N200755	XL: 9.5-10
N200756	2XL: 10.5-11

100 Gloves/Box 1000/Case

PHYSICAL PROPERTIES

Inner Surface	Smooth
Outer Surface	Finger Textured
Cuff Finish	Beaded
Fit Type	Ambidextrous
Length	9.5" / 242 mm
Finger Thickness	5.5mil / 0.15mm
Palm Thickness	5.0mil / 0.13mm
Tensile Strength Before Aging	14 MPa
Tensile Strength After Aging	14 MPa
Elongation Before Aging	500%
Elongation After Aging	400%
AQL	1.5



STANDARDS AND COMPLIANCE

EN ISO 21420:2020
EN 455-2000-2015
ASTM D6319
Reach EU 1907/2006
EU 2016/425

ORDERING INFORMATION

N200412	S: 6.5-7
N200413	M: 7.5-8
N200414	L: 8.5-9
N200415	XL: 9.5-10
N200416	2XL: 10.5-11

100 Gloves/Box 1000/Case

PHYSICAL PROPERTIES

Inner Surface	Smooth
Outer Surface	Finger Textured
Cuff Finish	Beaded
Fit Type	Ambidextrous
Length	9.5" / 242 mm
Finger Thickness	5.5mil / 0.15mm
Palm Thickness	5.0mil / 0.13mm
Tensile Strength Before Aging	14 MPa
Tensile Strength After Aging	14 MPa
Elongation Before Aging	500%
Elongation After Aging	400%
AQL	1.5



STANDARDS AND COMPLIANCE

EN ISO 21420:2020
EN 455-2000-2015
ASTM D6319
Reach EU 1907/2006
EU 2016/425

ORDERING INFORMATION

N716882	S: 6.5-7
N716883	M: 7.5-8
N716884	L: 8.5-9
N716885	XL: 9.5-10
N716886	2XL: 10.5-11

100 Gloves/Box 1000/Case

PHYSICAL PROPERTIES

Inner Surface	Smooth
Outer Surface	Fully Textured
Cuff Finish	Beaded
Fit Type	Ambidextrous
Length	9.5" / 242 mm
Finger Thickness	5.6mil / 0.14mm
Palm Thickness	5.0mil / 0.13mm
Tensile Strength Before Aging	22 MPa
Tensile Strength After Aging	20 MPa
Elongation Before Aging	540%
Elongation After Aging	520%
AQL	1.5



STANDARDS AND COMPLIANCE

EN ISO 21420:2020
EN 455:2000-2015
ASTM D6319-19
ASTM F1671-13
ASTM F739-12
Reach EU 1907/2006
EU 2016/425
CAT III Complex Design
FDA 21 CFR 177.2600

PF-95TL

NITRILE EXAM GLOVES WITH ECOTEK®

- Lightly textured surface delivers added grip
- Beaded cuff allows easy donning and doffing
- 100% air inspected / consistent thickness tip to cuff
- EcoTek® Sustainable Technology



PF-95GW

DUAL LAYER NITRILE EXAM GLOVES WITH
ENERGEL®, BREACH ALERT® AND ECOTEK®

- EnerGel hand rejuvenating technology for comfort and hand health
- Breach Alert dual-layer provides extra durability and safety
- 100% air inspected / consistent thickness tip to cuff
- EcoTek® Sustainable Technology



PF-95IN

NITRILE EXAM GLOVES

- Silicone-free for critical environments
- Optimal thickness for durability and tactile sensitivity
- Fully textured surface for wet and dry grip
- Tear-resistant beaded cuff for easy donning



ORDERING INFORMATION	
N200361	XS: 5.5-6
N200362	S: 6.5-7
N200363	M: 7.5-8
N200364	L: 8.5-9
N200365	XL: 9.5-10
N200366	2XL: 10.5-11
100 Gloves/Box 1000/Case	

PHYSICAL PROPERTIES	
Inner Surface	Smooth
Outer Surface	Fully Textured
Cuff Finish	Beaded
Fit Type	Ambidextrous
Length	9.5" / 242 mm
Finger Thickness	5.8mil / 0.15mm
Palm Thickness	5.0mil / 0.13mm
Tensile Strength Before Aging	21 MPa
Tensile Strength After Aging	20 MPa
Elongation Before Aging	560%
Elongation After Aging	540%
AQL	1.5
CE 0493 ISO 13485:2016 TYPE B ISO 13485:2016 BSIF Registered Body	

STANDARDS AND COMPLIANCE
EN ISO 21420:2020
EN 455:2000-2015
ASTM D6319-19
ASTM D6978-05 (2019)
ASTM F1671-13
ASTM F739-12
Reach EU 1907/2006
EU 2016/425
CAT III Complex Design

ORDERING INFORMATION	
N189471	XS: 5.5-6
N189472	S: 6.5-7
N189473	M: 7.5-8
N189474	L: 8.5-9
N189475	XL: 9.5-10
N189476	2XL: 10.5-11
50 Gloves/Box 500/Case	

PHYSICAL PROPERTIES	
Inner Surface	EnerGel / Breach Alert
Outer Surface	Fully Textured
Cuff Finish	Beaded
Fit Type	Ambidextrous
Length	9.5" / 242 mm
Finger Thickness	5.9mil / 0.15mm
Palm Thickness	4.9mil / 0.13mm
Tensile Strength Before Aging	18 MPa
Tensile Strength After Aging	18 MPa
Elongation Before Aging	550%
Elongation After Aging	500%
AQL	1.5
CE 0493 ISO 13485:2016 TYPE B ISO 13485:2016 BSIF Registered Body	

STANDARDS AND COMPLIANCE
EN ISO 21420:2020
EN 455:2000-2015
ASTM D6319-19
ASTM D6978-05 (2019)
ASTM F1671-13
ASTM F739-12
Reach EU 1907/2006
EU 2016/425
CAT III Complex Design
FDA 21 CFR 177.2600

ORDERING INFORMATION	
N700342	S: 6.5-7
N700343	M: 7.5-8
N700344	L: 8.5-9
N700345	XL: 9.5-10
N700346	2XL: 10.5-11
100 Gloves/Box 1000/Case	

PHYSICAL PROPERTIES	
Outer Surface	Finger Textured
Cuff Finish	Beaded
Fit Type	Ambidextrous
Length	9.5" / 242 mm
Finger Thickness	5.9mil / 0.15mm
Palm Thickness	5.0mil / 0.12mm
Tensile Strength Before Aging	14 MPa
Tensile Strength After Aging	14 MPa
Elongation Before Aging	500%
Elongation After Aging	400%
AQL	1.5
CE 0493 ISO 13485:2016 TYPE B ISO 13485:2016 BSIF Registered Body	

STANDARDS AND COMPLIANCE
EN 420-2003
EU 2016/425
CAT III Complex Design
FDA 21 CFR 177.2600



Models & Ordering Information

PF-95OR

NITRILE EXAM GLOVES WITH TRACTEK® AND ECOTEK®

- TracTek® high density pattern for grip in wet / oily conditions
- EcoTek® Sustainable Technology
- Hi-Vis orange color
- Beaded cuff allows easy donning and doffing



PF-95BL

NITRILE EXAM GLOVES WITH DRY CORE® AND ECOTEK®

- Dry Core absorbent technology keeps hands dry and cool
- Lightly textured surface delivers added grip
- Beaded cuff allows easy donning and doffing
- 100% air inspected / consistent thickness tip to cuff
- ANSI Level 3 abrasion resistance



PF-95GY

NITRILE EXAM GLOVES WITH DRITEK® AND ECOTEK®

- DriTek absorbent lining keeps hands dry and cool
- Fully textured surface delivers excellent grip
- 100% air inspected / consistent thickness tip to cuff
- EcoTek® Sustainable Technology



ORDERING INFORMATION

N991752	S: 6.5-7
N991753	M: 7.5-8
N991754	L: 8.5-9
N991755	XL: 9.5-10
N991756	2XL: 10.5-11

50 Gloves/Box 500/Case

PHYSICAL PROPERTIES

Inner Surface	Smooth
Outer Surface	TracTek
Cuff Finish	Beaded
Fit Type	Ambidextrous
Length	9.5" / 242 mm
Finger Thickness	5.9mil / 0.15mm
Palm Thickness	5.1mil / 0.13mm
Tensile Strength Before Aging	14 MPa
Tensile Strength After Aging	14 MPa
Elongation Before Aging	500%
Elongation After Aging	400%
AQL	1.5



STANDARDS AND COMPLIANCE

EN 420:2003
EN 455:2000-2015
EU 2016/425
Reach EU 1907/2006
ANSI/ISEA 105-2016
US/EU Food Contact

ORDERING INFORMATION

N106551	XS: 5.5-6
N106552	S: 6.5-7
N106553	M: 7.5-8
N106554	L: 8.5-9
N106555	XL: 9.5-10
N106556	2XL: 10.5-11

50 Gloves/Box 500/Case

PHYSICAL PROPERTIES

Inner Surface	Dry Core
Outer Surface	Fully Textured
Cuff Finish	Beaded
Fit Type	Ambidextrous
Length	9.5" / 242 mm
Finger Thickness	6.9mil / 0.18mm
Palm Thickness	6.1mil / 0.16mm
Tensile Strength Before Aging	20 MPa
Tensile Strength After Aging	19 MPa
Elongation Before Aging	560%
Elongation After Aging	550%
AQL	1.5



STANDARDS AND COMPLIANCE

EN ISO 21420:2020
EN 455:2000-2015
ASTM D6319-19
ASTM F1671-13
ASTM F739-12
Reach EU 1907/2006
EU 2016/425
CAT III Complex Design
ANSI/ISEA 105-2016
FDA 21 CFR 177.2600

ORDERING INFORMATION

N260501	XS: 5.5-6
N260502	S: 6.5-7
N260503	M: 7.5-8
N260504	L: 8.5-9
N260505	XL: 9.5-10
N260506	2XL: 10.5-11

50 Gloves/Box 500/Case

PHYSICAL PROPERTIES

Inner Surface	DriTek
Outer Surface	Fully Textured
Cuff Finish	Beaded
Fit Type	Ambidextrous
Length	9.5" / 242 mm
Finger Thickness	8.2mil / 0.21mm
Palm Thickness	6.2mil / 0.16mm
Tensile Strength Before Aging	15 MPa
Tensile Strength After Aging	16 MPa
Elongation Before Aging	550%
Elongation After Aging	500%
AQL	1.5



STANDARDS AND COMPLIANCE

EN ISO 21420:2020
EN 455:2000-2015
ASTM D6319-19
ASTM D6978-05 (2019)
ASTM F1671-13
ASTM F739-12
Reach EU 1907/2006
EU 2016/425
CAT III Complex Design
ANSI/ISEA 105-2016
FDA 21 CFR 177.2600



Models & Ordering Information

PF-12TL
EXTENDED CUFF HEAVY DUTY NITRILE EXAM GLOVES
WITH ECOTEK®

- Extended cuff provides added worker protection
- Tested for use with harmful chemotherapy drugs
- Lightly textured surface delivers added grip
- 100% air inspected / consistent thickness tip to cuff

PF

PF-12TL

WEIGHT	LENGTH	THICKNESS	FEATURES	COLOR
10.7g (large size)	12.0"	7.1 mil 6.2 mil	EcoTek® Clean Washed Air Inspected	TEAL

ECOTEK

TESTED FOR USE WITH
FENTANYL & SIMULATED
GASTRIC ACID

CLINICALLY TESTED
LOW
DERMATITIS
POTENTIAL

TESTED FOR USE WITH
CHEMOTHERAPY
DRUGS

PF-12WG
EXTENDED CUFF NITRILE EXAM GLOVES WITH
ENERGEL®, BREACH ALERT®, pH NATURAL®, AND
ECOTEK®

- Fully textured surface for wet and dry grip
- Extended-cuff for added coverage and protection
- Tear-resistant beaded cuff for easy donning

PF

PF-12WG

WEIGHT	LENGTH	THICKNESS	FEATURES	COLOR
10.3g (large size)	12.0"	7.0 mil 6.0 mil	pH Natural® EnerGel® Breach Alert® EcoTek®	WHITE GREEN

ECOTEK

CLINICALLY TESTED
LOW
DERMATITIS
POTENTIAL

PF-12OR
EXTENDED CUFF NITRILE EXAM GLOVES WITH
ECOTEK®

- Extended-cuff for added coverage and protection
- EcoTek® Sustainable Technology
- Clean Washed & 100% air-inspected for consistent, residue-free quality
- Silicone-free & FDA-compliant for safe contact with wet and oily foods
- Fish-scale texture delivers strong grip in dry, wet, and oily conditions
- Enhanced puncture and abrasion resistance for tougher protection

PF

PF-12OR

WEIGHT	LENGTH	THICKNESS	FEATURES	COLOR
13.3g (large size)	12.0"	11.2 mil 8.0 mil	EcoTek® Clean Washed Air Inspected	ORANGE

ECOTEK

CLINICALLY TESTED
LOW
DERMATITIS
POTENTIAL

ORDERING INFORMATION	
N127361	XS: 5.5-6
N127362	S: 6.5-7
N127363	M: 7.5-8
N127364	L: 8.5-9
N127365	XL: 9.5-10
N127366	2XL: 10.5-11
50 Gloves/Box 500/Case	

PHYSICAL PROPERTIES	
Inner Surface	Smooth
Outer Surface	Fully Textured
Cuff Finish	Beaded
Fit Type	Ambidextrous
Length	12.0" / 305 mm
Finger Thickness	7.1mil / 0.18mm
Palm Thickness	6.2mil / 0.16mm
Tensile Strength Before Aging	21 MPa
Tensile Strength After Aging	20 MPa
Elongation Before Aging	575%
Elongation After Aging	560%
AQL	1.5
CE 0493 ISO 22810-2:2016 TYPE B EN ISO 22810-2:2016	

STANDARDS AND COMPLIANCE
EN ISO 21420:2020
EN 455:2000-2015
ASTM D6319-19
ASTM D6978-05 (2019)
ASTM F1671-13
ASTM F739-12
Reach EU 1907/2006
EU 2016/425
CAT III Complex Design
FDA 21 CFR 177.2600

ORDERING INFORMATION	
N188172	XS: 5.5-6
N188173	S: 6.5-7
N188174	M: 7.5-8
N188175	L: 8.5-9
N188176	*XL: 9.5-10
N188177	*2XL: 10.5-11
100 Gloves/Box 1000/Case *90/Box, 900/Case	

PHYSICAL PROPERTIES	
Inner Surface	Breach Alert / EnerGel
Outer Surface	Fully Textured
Cuff Finish	Beaded
Fit Type	Ambidextrous
Length	12.0" / 305 mm
Finger Thickness	7.0mil / 0.18mm
Palm Thickness	6.0mil / 0.15mm
Tensile Strength Before Aging	14 MPa
Tensile Strength After Aging	14 MPa
Elongation Before Aging	500%
Elongation After Aging	400%
AQL	1.5
CE 0493 ISO 22810-2:2016 TYPE B EN ISO 22810-2:2016	

STANDARDS AND COMPLIANCE
EN ISO 21420:2020
EN 455:2000-2015
ASTM D6319-19
ASTM F1671-13
ASTM F739-12
Reach EU 1907/2006
EU 2016/425
CAT III Complex Design
FDA 21 CFR 177.2600

ORDERING INFORMATION	
N909753	M: 7.5-8
N909754	L: 8.5-9
N909755	XL: 9.5-10
N909756	2XL: 10.5-11
N909757	3XL: 11.5-12
50 Gloves/Box 500/Case	

PHYSICAL PROPERTIES	
Inner Surface	Smooth
Outer Surface	Fully Textured
Cuff Finish	Beaded
Fit Type	Ambidextrous
Length	12.0" / 290 mm
Finger Thickness	11.2mil / 0.28mm
Palm Thickness	8.0mil / 0.20mm
Tensile Strength Before Aging	14 MPa
Tensile Strength After Aging	14 MPa
Elongation Before Aging	500%
Elongation After Aging	400%
AQL	1.5
EN ISO 22810-2:2016	


STANDARDS AND COMPLIANCE
EN ISO 21420:2020
EN 455-2000-2015
ASTM D6978-05 (2019)
Reach EU 1907/2006
EU 2016/425
FDA 21 CFR 177.2600






Models & Ordering Information

PF-12BL
EXTENDED CUFF NITRILE EXAM GLOVES WITH
ECOTEK®

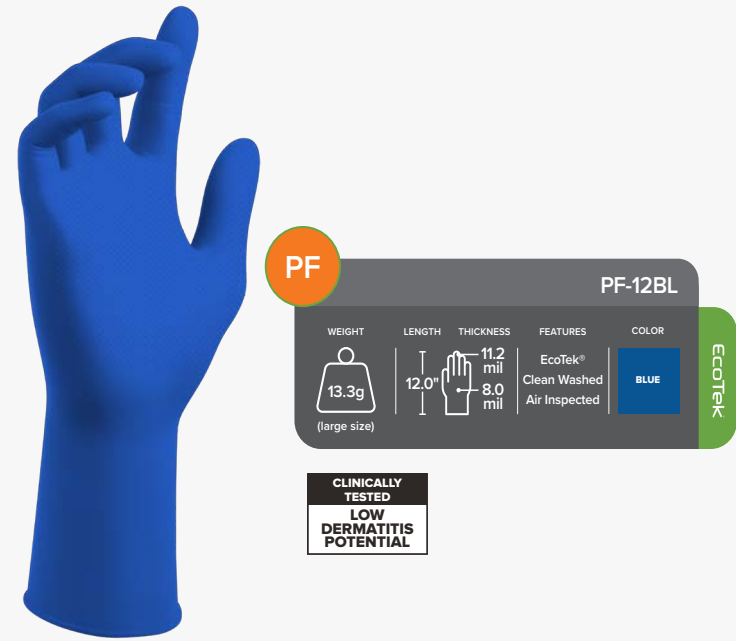- Extended-cuff for added coverage and protection
- EcoTek® Sustainable Technology
- Clean Washed & 100% air-inspected for consistent, residue-free quality
- Silicone-free & FDA-compliant for safe contact with wet and oily foods
- Fish-scale texture delivers strong grip in dry, wet, and oily conditions
- Enhanced puncture and abrasion resistance for tougher protection



ORDERING INFORMATION		PHYSICAL PROPERTIES	
N909553	M: 7.5-8	Inner Surface	Smooth
N909554	L: 8.5-9	Outer Surface	Fully Textured
N909555	XL: 9.5-10	Cuff Finish	Beaded
N909556	2XL: 10.5-11	Fit Type	Ambidextrous
N909557	3XL: 11.5-12	Length	12.0" / 290 mm
50 Gloves/Box 500/Case		Finger Thickness	11.2mil / 0.28mm
		Palm Thickness	8.0mil / 0.20mm
		Tensile Strength Before Aging	14 MPa
		Tensile Strength After Aging	14 MPa
		Elongation Before Aging	500%
		Elongation After Aging	400%
		AQL	1.5
		<div><div>18/105 2014.5.2019</div><div></div><div></div></div>	

STANDARDS AND COMPLIANCE
EN ISO 21420:2020
EN 455-2000-2015
ASTM D6978-05 (2019)
Reach EU 1907/2006
EU 2016/425
FDA 21 CFR 177.2600



INTRICATE. TECHNICAL. ADVANCED.

Born of SW® manufacturing capabilities and advancements in material science, PowerChem offers chemical protection for highly specific applications. SW will be introducing new PowerChem styles that address a range of complex and specialized technical needs.




EXCEPTIONAL PERFORMANCE

Designed for cleanroom environments, these gloves offer precision, protection, and convenience. With a 6.2 mil finger thickness for enhanced dexterity, they incorporate EcoTek® sustainable technology for reduced environmental impact. Packaged in a storage-efficient bag, they utilize SafeDon® cuff-first dispensing to minimize cross-contamination—reducing bacteria and mold exposure by up to 95.9%—and improve storage efficiency. The packaging also cuts space needs by 40% and reduces cardboard waste, supporting sustainability and cost savings.



PC-12WT

EcoTek®

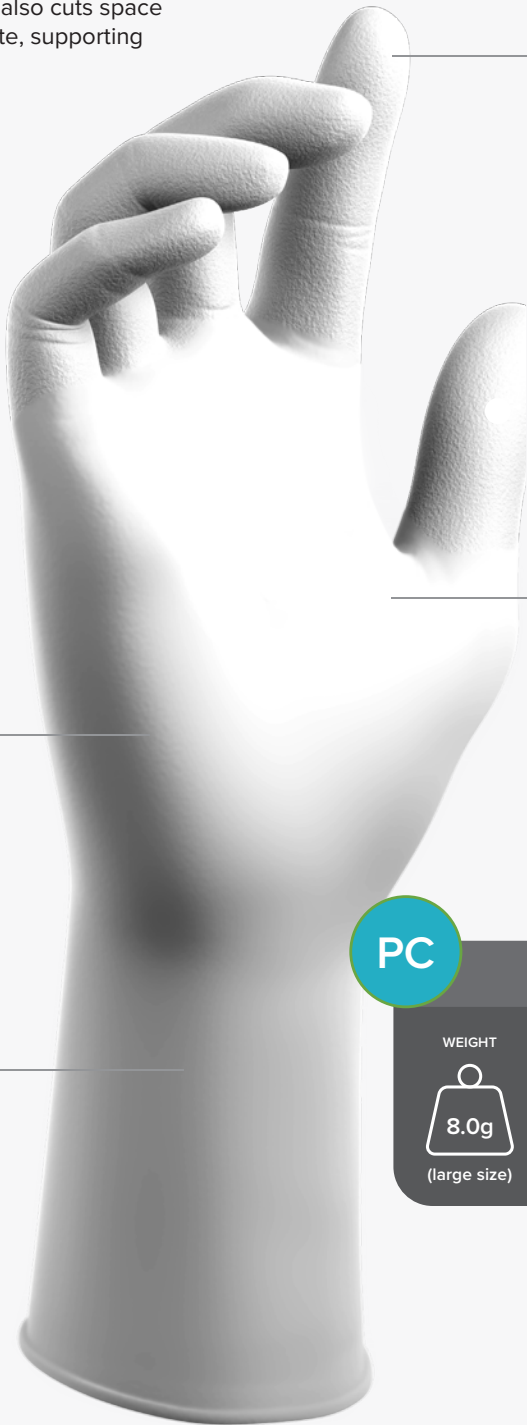

ENHANCED GRIP & DEXTERITY

Finger textured surface for wet and dry grip

CLEANROOM-RATED

Manufactured for Class 100 (ISO 5) cleanrooms with ultra-low particle levels to protect your controlled environment

GOOD BYE

EcoTek Sustainable Technology

Low Dermatitis Potential

Formulated to minimize the risk of Type I and Type IV allergic reactions, supporting user comfort in extended wear.

PC

PC-12WT

WEIGHT	LENGTH	THICKNESS	FEATURES	COLOR
8.0g (large size)	12.0"	6.2 mil 5.0 mil	EcoTek®	WHITE

EcoTek



ORDERING INFORMATION

N427102	S: 6.5-7
N427103	M: 7.5-8
N427104	L: 8.5-9
N427104	XL: 9.5-10

100 Gloves/Box 1000/Case

PHYSICAL PROPERTIES

Inner Surface	Smooth
Outer Surface	Textured
Cuff Finish	Beaded
Fit Type	Ambidextrous
Length	12" / 290 mm
Finger Thickness	6.2mil / 0.16mm
Palm Thickness	5.0mil / 0.12mm
Tensile Strength Before Aging	14 MPa
Tensile Strength After Aging	14 MPa
Elongation Before Aging	500%
Elongation After Aging	400%
AQL	1.5



STANDARDS AND COMPLIANCE

ISO 14644-9:2012
IEST-RP-CC005.4
ASTM D6319-19
ASTM F1671-13
ASTM D5151-19
ASTM D6978-05(2019)
ASTM F1671-13
EN ISO 21420:2020
EN 374:2016+A1:2018
EN 455-2000-2015
EN ISO 23464:2020
ASTM F739-12
Reach EU 1907/2006
EU 2016/425
FDA 21 CFR 177.2600



Models & Ordering Information

PC-045-095-GR

NEOPRENE EXAM GLOVES

- Extended cuff provides added protection
- Fully textured surface delivers excellent grip
- 100% air inspected / consistent thickness tip to cuff
- Extra thickness for more durability



PC-95GR

NEOPRENE EXAM GLOVES

- Tested for use with chemotherapy drugs
- Textured surface delivers excellent grip
- Beaded cuff allows easy donning and doffing
- Neoprene material for softness, elasticity, and chemical resistance




PC-12WT

ECOTEK SUSTAINABLE

NITRILE CLEANROOM GLOVES

- EcoTek® Sustainable Technology*
- SafeDon® dispensing minimizes cross-contamination while delivering significant space and packaging savings.
- Low Dermatitis Potential minimizes the risk of Type I and Type IV allergies and enhances safety for users with sensitive skin
- Class 100 (ISO 5) cleanroom gloves
- Extended-cuff for additional protection

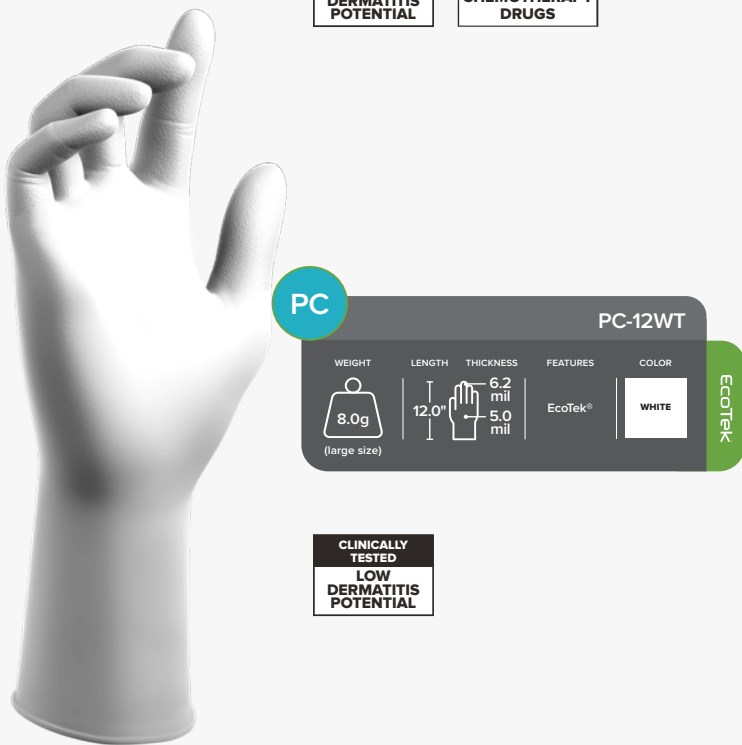

ORDERING INFORMATION	
K000402	S: 6.5-7
K000403	M: 7.5-8
K000404	L: 8.5-9
K000405	XL: 9.5-10
K000406	2XL: 10.5-11
100 Gloves/Box 1000/Case	

PHYSICAL PROPERTIES	
Inner Surface	Smooth
Outer Surface	Textured
Cuff Finish	Beaded
Fit Type	Ambidextrous
Length	9.5" / 242 mm
Finger Thickness	3.5mil / 0.09mm
Palm Thickness	2.8mil / 0.07mm
Tensile Strength Before Aging	14 MPa
Tensile Strength After Aging	14 MPa
Elongation Before Aging	500%
Elongation After Aging	400%
AQL	1.5

STANDARDS AND COMPLIANCE
EN ISO 21420:2020
EN 455:2000-2015
ASTM D6977-19
Reach EU 1907/2006
EU 2016/425
FDA 21 CFR 177.2600

ORDERING INFORMATION	
K001401	XS: 5.5-6
K001402	S: 6.5-7
K001403	M: 7.5-8
K001404	L: 8.5-9
K001405	XL: 9.5-10
K001406	2XL: 10.5-11
100 Gloves/Box 1000/Case	

PHYSICAL PROPERTIES	
Inner Surface	Smooth
Outer Surface	Textured
Cuff Finish	Beaded
Fit Type	Ambidextrous
Length	9.5" / 242 mm
Finger Thickness	6.2mil / 0.16mm
Palm Thickness	4.7mil / 0.12mm
Tensile Strength Before Aging	18 MPa
Tensile Strength After Aging	18 MPa
Elongation Before Aging	750%
Elongation After Aging	700%
AQL	1.5

STANDARDS AND COMPLIANCE
EN ISO 21420:2020
EN 455:2000-2015
ASTM D6977-19
ASTM F1671-13
ASTM F739-12
Reach EU 1907/2006
EU 2016/425
CAT III Complex Design
FDA 21 CFR 177.2600

ORDERING INFORMATION	
N427102	S: 6.5-7
N427103	M: 7.5-8
N427104	L: 8.5-9
N427104	XL: 9.5-10
100 Gloves/Box 1000/Case	

PHYSICAL PROPERTIES	
Inner Surface	Smooth
Outer Surface	Textured
Cuff Finish	Beaded
Fit Type	Ambidextrous
Length	12" / 290 mm
Finger Thickness	6.2mil / 0.16mm
Palm Thickness	5.0mil / 0.12mm
Tensile Strength Before Aging	14 MPa
Tensile Strength After Aging	14 MPa
Elongation Before Aging	500%
Elongation After Aging	400%
AQL	1.5

STANDARDS AND COMPLIANCE
ISO 14644-9:2012
IEST-RP-CC005.4
ASTM D6319-19
ASTM F1671-13
ASTM D5151-19
ASTM D6978-05(2019)
ASTM F1671-13
EN ISO 21420:2020
EN 374:2016+A1:2018
EN 455-2000-2015
EN ISO 23464:2020
ASTM F739-12
Reach EU 1907/2006
EU 2016/425
FDA 21 CFR 177.2600



TOUGHER. ROUGHER. READY.

MegaMan pushes the boundaries of single-use hand protection performance with new levels of abrasion resistance, sweat management, and comfort that deliver in exceedingly severe environments. When protection performance matters most, it's no wonder MegaMan gets the call for the toughest jobs.



MEGA TOUGH

The glove that set the new standard for single-use protection. Featuring a consistent 8.5 mil thickness, ANSI Level 3 abrasion resistance, and DriTek® absorbent lining, it is ready to take the call for any job.



MM-11BK

DriTek®

EcoTek®

RELIABLY TOUGH

Consistent 8.5 mil thickness for tip to cuff consistency, and 100% air inspected.

NO SWEAT, IT'S DRITEK®

Moisture absorbent lining keeps hands dry, cool and healthy.

MULTILAYER CONSTRUCTION

ANSI and EN Level 3 abrasion resistance that lasts up to 3x longer.



ORDERING INFORMATION

N260881	XS: 5.5-6
N260882	S: 6.5-7
N260883	M: 7.5-8
N260884	L: 8.5-9
N260885	XL: 9.5-10
N260886	2XL: 10.5-11
N260887	3XL: 11.5-12

50 Gloves/Box 500/Case

VEND PACK

N164882	S: 6.5-7
N164883	M: 7.5-8
N164884	L: 8.5-9
N164885	XL: 9.5-10
N164886	2XL: 10.5-11
N164887	3XL: 11.5-12

8 Gloves/Pack 800/Case

PHYSICAL PROPERTIES

Inner Surface	DriTek
Outer Surface	Fully Textured
Cuff Finish	Beaded
Fit Type	Ambidextrous
Length	11.0" / 280 mm
Finger Thickness	10.1mil / 0.26mm
Palm Thickness	8.5mil / 0.22mm
Tensile Strength Before Aging	17 MPa
Tensile Strength After Aging	16 MPa
Elongation Before Aging	560%
Elongation After Aging	520%
AQL	1.5



STANDARDS AND COMPLIANCE

EN ISO 21420:2020
EN 455:2000-2015
ASTM D6319-19
ASTM D6978-05 (2019)
ASTM F1671-13
ASTM F739-12
Reach EU 1907/2006
EU 2016/425
ANSI/ISEA 105-2016
CAT III Complex Design
FDA 21 CFR 177.2600

Bantam™

LIGHTWEIGHT TPE PROTECTION

Bantam is the economical choice for comfort and convenient protection. Available in exam grade and industrial grade styles, TPE gloves provide chemical resistance similar to natural rubber latex while offering a high degree of sensitivity and dexterity. The clean material and manufacturing process result in low residue gloves that reduce the risk of harmful skin reactions – making them suitable for a wide range of workers.



Models & Ordering Information

P-021-098-WT

WHITE SINGLE-USE THERMOPLASTIC ELASTOMER (TPE) GLOVES

- Food safe
- High tensile strength and stretchability
- Industrial use 4.0 AQL
- Outperforms vinyl gloves



P-024-098-ECO-WT

WHITE EXAM SUSTAINABLE GRADE THERMOPLASTIC ELASTOMER (TPE) GLOVES

- Food safe
- High tensile strength and stretchability
- Exceeds 1.5 AQL laboratory standards
- Outperforms vinyl gloves
- EcoTek sustainable technology



ORDERING INFORMATION	
P790103	M: 7.5-8
P790104	L: 8.5-9
P790105	XL: 9.5-10
200 Gloves/Box 5 Boxes/Case	

PHYSICAL PROPERTIES	
Material	TPE
Cuff Type	Straight
Fit Type	Ambidextrous
Length	9.8"
Palm Thickness	2.1mil
Cuff Thickness	2.1mil
Finger Thickness	2.1mil
Tensile Strength Before Aging	11 MPa
Tensile Strength After Aging	11 MPa
Elongation Before Aging	300%
Elongation After Aging	300%
AQL	4.0
CE	

STANDARDS AND COMPLIANCE
EN ISO 21420:2020
Reach EU 1907/2006
EU 2016/425

ORDERING INFORMATION	
P700102	S: 6.5-7
P700103	M: 7.5-8
P700104	L: 8.5-9
P700105	XL: 9.5-10
200 Gloves/Box 5 Boxes/Case	

PHYSICAL PROPERTIES	
Material	TPE
Cuff Type	Straight
Fit Type	Ambidextrous
Length	9.8"
Palm Thickness	3.2mil
Cuff Thickness	3.2mil
Finger Thickness	3.2mil
Tensile Strength Before Aging	11 MPa
Tensile Strength After Aging	11 MPa
Elongation Before Aging	300%
Elongation After Aging	300%
AQL	1.5
CE	

STANDARDS AND COMPLIANCE
EN ISO 21420:2020
EN 455-2000-2015
ASTM D5250-19
Reach EU 1907/2006
EU 2016/425



MECHANICAL PROTECTION

SW® has brought its innovation and hand health mindset to cut-resistant gloves. Our new products are developed in the service of protecting workers and giving them more comfort and confidence to make them more successful every day.



THE INDUSTRIAL UPGRADE

GRAPHEX® is a new line of hand protection featuring our AxiFybr® cut-resistant technology.

Proprietary AxiFybr® yarn is engineered at the molecular level enabling GraphEx™ products to provide the highest level of cut protection without loss of comfort, fit or flexibility.

GRAPHEX®

featuring

AxiFybr

GRAPHEX® with AxiFybr® Cut-Resistant Technology
48% stronger, **21%** more cut-resistant, and **2X** more abrasion-resistant than the competition.

GRAPHEX™

G45100



GRAPHEX™

G46200



GRAPHEX™

G66200



Models & Ordering Information

G45100

CUT RESISTANT LEVEL 4 MECHANICAL GLOVES WITH AXIFYBR®

- Even at advanced abrasion levels, these are touch screen compatible.
- Proprietary yarn technology is 45% stronger and 21% more cut-resistant without sacrificing fit or comfort.
- Hi-Vis cuff provides instant indication of specific cut level and size from a distance.



G46200

CUT RESISTANT LEVEL 4 MECHANICAL GLOVES WITH AXIFYBR®

- Even at advanced abrasion levels, these are touch screen compatible.
- Proprietary yarn technology is 45% stronger and 21% more cut-resistant without sacrificing fit or comfort.
- Hi-Vis cuff provides instant indication of specific cut level and size from a distance.



G66200

CUT RESISTANT LEVEL 6 MECHANICAL GLOVES WITH AXIFYBR®

- Even at advanced abrasion levels, these are touch screen compatible.
- Proprietary yarn technology is 45% stronger and 21% more cut-resistant without sacrificing fit or comfort.
- Hi-Vis cuff provides instant indication of specific cut level and size from a distance.



ORDERING INFORMATION	
G451002	S: 7
G451003	M: 8
G451004	L: 9
G451005	XL: 10
G451006	2XL: 11
12 Pairs/Bag 6 Bags/Case	

PHYSICAL PROPERTIES	
Coating Material	Micro Porous Nitrile
Liner Material	AxiFybr®
Cuff Type	Knit
Fit Type	Hand-Specific
Length	10.2"
Abrasion Level	ANSI 5
Cut Level	ANSI A4
Gauge	18G
<div><div></div><div></div><div></div><div></div><div></div></div>	

STANDARDS AND COMPLIANCE
EN 420-2003+A1: 2009
EN 388:2016
FDA 21 CFR 177.1520
FDA 21 CFR 177.2600

ORDERING INFORMATION	
G462002	S: 7
G462003	M: 8
G462004	L: 9
G462005	XL: 10
G462006	2XL: 11
12 Pairs/Bag 6 Bags/Case	

PHYSICAL PROPERTIES	
Coating Material	Micro Porous Nitrile
Liner Material	AxiFybr®
Cuff Type	Knit
Fit Type	Hand-Specific
Length	10.2"
Abrasion Level	ANSI 6
Cut Level	ANSI A4
Gauge	18G
<div><div></div><div></div><div></div><div></div><div></div></div>	

STANDARDS AND COMPLIANCE
EN 420-2003+A1: 2009
EN 388:2016
FDA 21 CFR 177.1520
FDA 21 CFR 177.2600

ORDERING INFORMATION	
G662002	S: 7
G662003	M: 8
G662004	L: 9
G662005	XL: 10
G662006	2XL: 11
12 Pairs/Bag 6 Bags/Case	

PHYSICAL PROPERTIES	
Coating Material	Micro Porous Nitrile
Liner Material	AxiFybr®
Cuff Type	Knit
Fit Type	Hand-Specific
Length	10.2"
Abrasion Level	ANSI 6
Cut Level	ANSI A6
Gauge	18G
<div><div></div><div></div><div></div><div></div><div></div></div>	

STANDARDS AND COMPLIANCE
EN 420-2003+A1: 2009
EN 388:2016
FDA 21 CFR 177.1520
FDA 21 CFR 177.2600

KARBONHEX

MECHANICAL PROTECTION GLOVES

KARBONHEX® is an advanced, innovative range of ergonomic hand protection that was originally conceptualized, designed and styled specifically for professionals working in the most challenging conditions.



KARBONHEX

Models & Ordering Information

KARBONHEX KX70

- PURPOSE BUILT CUT-RESISTANT GLOVES
- KOMPLEX HANDLING
- 10 gauge cut-resistant, knitted thermal shell
 - Sandy foam latex with 3/4 dip
 - Elastic knit wrist ensures a comfortable and secure fit



ORDERING INFORMATION	
C244653	M: 8
C244654	L: 9
C244655	XL: 10
C244656	2XL: 11
12 Pairs/Bag 6 Bags/Case	

PHYSICAL PROPERTIES	
Coating Material	Latex
Liner Material	Knitted Fleece
Grip Finish	Sandy
Fit Type	Hand-Specific
Length	10.2"
Abrasion Level	ANSI 4 / EN388 1
Cut Level	ANSI 4 / EN388 B
Gauge	10G
<div><div>EN388-2016</div><div>10.2" 3841B</div><div>EN511-2016</div><div>22X</div><div>ANSI 4</div><div>ABRASION</div><div>ANSI A2</div><div>CUT</div></div>	

STANDARDS AND COMPLIANCE
EN 511: 2016
EN 388:2016

KARBONHEX KX84V

- PURPOSE BUILT COLD-RESISTANT GLOVES
- KOMPLEX HANDLING
- 10 gauge cut-resistant, hi-vis, knitted thermal shell
 - Sandy foam latex with 3/4 dip
 - Elastic knit wrist ensures a comfortable and secure fit



ORDERING INFORMATION	
C334613	M: 8
C334614	L: 9
C334615	XL: 10
C334616	2XL: 11
12 Pairs/Bag 6 Bags/Case	

PHYSICAL PROPERTIES	
Coating Material	Latex
Liner Material	Knitted Fleece
Grip Finish	Sandy
Fit Type	Hand-Specific
Length	10.2"
Abrasion Level	ANSI 3 / EN388 1
Cut Level	ANSI A4 / EN388 C
Gauge	10G
<div><div>EN388-2016</div><div>10.2" 1031C</div><div>EN511-2016</div><div>11X</div><div>ANSI 3</div><div>ABRASION</div><div>ANSI A3</div><div>CUT</div></div>	

STANDARDS AND COMPLIANCE
EN 511: 2016
EN 388:2016

KARBONHEX KX10

- PURPOSE BUILT CUT-RESISTANT GLOVES
- KOMPLEX HANDLING
- Close-fitting seamless 18-gauge knitted composite shell
 - Fusion PU/nitrile palm coating
 - Reinforced nitrile patch on thumb crotch



ORDERING INFORMATION	
C365902	S: 7
C365903	M: 8
C365904	L: 9
C365905	XL: 10
C365906	2XL: 11
12 Pairs/Bag 6 Bags/Case	

PHYSICAL PROPERTIES	
Coating Material	Nitrile / Water-Based Polyurethane
Liner Material	HPPE+
Grip Finish	Micro Foam (Pitted)
Fit Type	Hand-Specific
Length	10.2"
Abrasion Level	ANSI 6 / EN388 4
Cut Level	ANSI A3 / EN388 C
Gauge	18G
<div><div>EN388-2016</div><div>10.2" 4842C</div><div>ANSI 6</div><div>ABRASION</div><div>ANSI A3</div><div>CUT</div></div>	

STANDARDS AND COMPLIANCE
EN 388:2016

KARBONHEX

Models & Ordering Information

KARBONHEX KX41

PURPOSE BUILT LIQUID-RESISTANT GLOVES

PRECISION HANDLING

- Elastic knit wrist for comfort
- Nitrile palm coating with sandy texture
- Smooth 3/4 dip nitrile base coating
- Superfine seamless 18-gauge knitted nylodex shell



ORDERING INFORMATION	
C164002	S: 7
C164003	M: 8
C164004	L: 9
C164005	XL: 10
C164006	2XL: 11
12 Pairs/Bag 6 Bags/Case	

PHYSICAL PROPERTIES	
Coating Material	Nitrile
Liner Material	Nylon / Spandex
Grip Finish	Sandy
Fit Type	Hand-Specific
Length	10.2"
Abrasion Level	ANSI 6 / EN388 4
Cut Level	ANSI A1 / EN388 1
Gauge	18G
<div><div>EN388:2016</div><div>4131X</div><div>ANSI 6</div><div>ABRASION</div><div>ANSI A1</div><div>CUT</div></div>	

STANDARDS AND COMPLIANCE
EN 388:2016

KARBONHEX KX42

PURPOSE BUILT ABRASION-RESISTANT GLOVES

PRECISION HANDLING

- Elastic knit wrist for comfortable and secure fit.
- Sandy nitrile coated palm
- 15g knitted nylodex seamless shell



ORDERING INFORMATION	
C162072	S: 7
C162073	M: 8
C162074	L: 9
C162075	XL: 10
C162076	2XL: 11
12 Pairs/Bag 6 Bags/Case	

PHYSICAL PROPERTIES	
Coating Material	Nitrile
Liner Material	Nylon / Spandex
Grip Finish	Sandy
Fit Type	Hand-Specific
Length	10.2"
Abrasion Level	ANSI 6 / EN388 4
Cut Level	ANSI A1 / EN388 1
Gauge	15G
<div><div>EN388:2016</div><div>4121X</div><div>ANSI 6</div><div>ABRASION</div><div>ANSI A1</div><div>CUT</div></div>	

STANDARDS AND COMPLIANCE
EN 388:2016

KARBONHEX KX43A

PURPOSE BUILT IMPACT-RESISTANT GLOVES

PRECISION HANDLING

- Seamless 15-gauge knitted nylodex shell
- Nitrile palm coating with sandy texture
- TPR integrated expansion slots and flex points
- Smooth 3/4 dip nitrile base coating



ORDERING INFORMATION	
C166772	S: 7
C166773	M: 8
C166774	L: 9
C166775	XL: 10
C166776	2XL: 11
12 Pairs/Bag 6 Bags/Case	

PHYSICAL PROPERTIES	
Coating Material	Nitrile
Liner Material	Nylon / Spandex
Grip Finish	Sandy
Fit Type	Hand-Specific
Length	10.2"
Abrasion Level	ANSI 6 / EN388 4
Cut Level	ANSI A1 / EN388 1
Gauge	15G
<div><div>EN388:2016</div><div>4131X</div><div>ANSI 6</div><div>ABRASION</div><div>ANSI A1</div><div>CUT</div><div>ANSI / ISEA 136</div><div>1</div></div>	

STANDARDS AND COMPLIANCE
EN 388:2016

KARBONHEX

Models & Ordering Information

KARBONHEX KX80

- PURPOSE BUILT CUT-RESISTANT GLOVES
- KOMPLEX HANDLING
- Comfortable elastic knit wrist
 - Sandy foam nitrile palm coating
 - Lightweight close fitting 18-gauge composite knit shell



KARBONHEX KX90

- PURPOSE BUILT IMPACT-RESISTANT
GLOVES KOMPLEX HANDLING
- Close fitting 18-gauge composite knit shell
 - Sandy foam nitrile palm coating
 - Full, low profile finger and knuckle TPR guards



ORDERING INFORMATION	
C442802	S: 7
C442803	M: 8
C442804	L: 9
C442805	XL: 10
C442806	2XL: 11
12 Pairs/Bag 6 Bags/Case	

PHYSICAL PROPERTIES	
Coating Material	Nitrile
Liner Material	HPPE +
Grip Finish	Sandy
Fit Type	Hand-Specific
Length	10.2"
Abrasion Level	ANSI 4 / EN388 3
Cut Level	ANSI A4 / EN388 B
Gauge	18G

EN388:2016
4X42D

EN16350:2016

ANSI
4
ABRASION

ANSI
A4
CUT

STANDARDS AND COMPLIANCE
EN 388:2016
EN 16350: 2016

ORDERING INFORMATION	
C442702	S: 7
C442703	M: 8
C442704	L: 9
C442705	XL: 10
C442706	2XL: 11
12 Pairs/Bag 6 Bags/Case	

PHYSICAL PROPERTIES	
Coating Material	Nitrile
Liner Material	HPPE +
Grip Finish	Sandy
Fit Type	Hand-Specific
Length	10.2"
Abrasion Level	ANSI 4 / EN388 4
Cut Level	ANSI A4 / EN388 D
Gauge	18G

EN388:2016
4X42D

ANSI
4
ABRASION

ANSI
A4
CUT

ANSI / ISEA 130
1

STANDARDS AND COMPLIANCE
EN 388:2016

TotalForm[®]

THE ULTIMATE COMBINATION

TotalForm[®] gloves are designed for exceptional comfort, durability, and performance. Featuring an EcoTek[®] sustainable nitrile coating, these gloves provide superior fit, fingertip dexterity, and excellent grip. The flexible liner and snug-fit cuff enhance comfort while reducing hand fatigue. With touchscreen compatibility and reliable protection, TotalForm[®] gloves are built to support various tasks with ease.



GENERAL PURPOSE BIO-BASED GLOVES

Protect your hands and the environment with a general-purpose glove that combines a liner made of 55% bio-based materials and an EcoTek® sustainable nitrile coating for exceptional comfort. Designed to safeguard both the environment and your hands, this glove features bio-based monomer materials derived from natural sources. The product contains 35% bio-based materials.

TotalForm®
TF-14BK

BioFlex360

BioFlex360™ Engineered for breathability and ergonomic comfort, with a flexible liner and snug-fit cuff. Delivers full protection and all-around performance to reduce hand fatigue.

GOOD BYE

EcoTek® sustainable nitrile coating

MADE FROM BIO-BASED MATERIALS

Natural fiber liner is made of 55% bio-based materials, sourced from natural resources and not petroleum-based

TotalForm®
TF-14BK

RATINGS		COATING	GRIP	FEATURES	COLOR
ANSI A1 CUT	ANSI 4 ABRASION	Nitrile	Micro Foam	Superior Comfort Touchscreen Compatible	BLACK GRAY



ORDERING INFORMATION	
C141002	S: 7
C141003	M: 8
C141004	L: 9
C141005	XL: 10
C141006	2XL: 11
12 Pairs/Bag 6 Bags/Case	

PHYSICAL PROPERTIES	
Coating Material	Nitrile
Liner Material	Nylon/Spandex
Grip Finish	Micro Foam
Fit Type	Hand-Specific
Length	9.5"
Abrasion Level	ANSI 4
Cut Level	ANSI A1
Gauge	18G



STANDARDS AND COMPLIANCE
EN 420-2003+A1: 2009
EN 388: 2016
FDA 21 CFR 177.1520
FDA 21 CFR 177.2600
Oeko-Tex Standard 100 Certification
ASTM D5526

TotalForm®

Models & Ordering Information

TF-14BK

GENERAL PURPOSE BIO-BASED GLOVES WITH
BIOFLEX360™ AND ECOTEK® COATING

- EcoTek® sustainable nitrile coating
- BioFlex360™ Engineered for breathability and ergonomic comfort, with a flexible liner and snug-fit cuff.
- Delivers full protection and all-around performance to reduce hand fatigue.
- Liner is made of 55% bio-based materials
- Superior fingertip dexterity
- Excellent dry grip performance
- Touch screen compatibility



TF-44BK

HIGH PERFORMANCE CUT-RESISTANCE GLOVES WITH
BIOFLEX360™, AXIFYBR®, AND ECOTEK® COATING

- EcoTek® sustainable nitrile coating
- BioFlex360™ Engineered for breathability and ergonomic comfort, with a flexible liner and snug-fit cuff.
- Flexible A4 seamless-knit liner designed for increased comfort and reduced hand fatigue
- Superior fingertip dexterity for precision in handling
- Microfoam palm coating provides a secure grip while maintaining comfort during use
- Touch screen compatibility



ORDERING INFORMATION	
C141002	S: 7
C141003	M: 8
C141004	L: 9
C141005	XL: 10
C141006	2XL: 11
12 Pairs/Bag 6 Bags/Case	

PHYSICAL PROPERTIES	
Coating Material	Nitrile
Liner Material	Nylon/Spandex
Grip Finish	Micro Foam
Fit Type	Hand-Specific
Length	9.5"
Abrasion Level	ANSI 4
Cut Level	ANSI A1
Gauge	18G
<div><div>EN388:2016</div><div>ANSI 4</div><div>ANSI A1</div><div>3121A</div><div>ABRASION</div><div>CUT</div><div>Oeko TEX</div><div>STANDARD 100</div><div>CE</div></div>	

STANDARDS AND COMPLIANCE
EN 420-2003+A1: 2009
EN 388: 2016
FDA 21 CFR 177.1520
FDA 21 CFR 177.2600
Oeko-Tex Standard 100 Certification
ASTM D5526

ORDERING INFORMATION	
C441002	S: 7
C441003	M: 8
C441004	L: 9
C441005	XL: 10
C441006	2XL: 11
12 Pairs/Bag 6 Bags/Case	

PHYSICAL PROPERTIES	
Coating Material	Nitrile
Liner Material	Nylon/Spandex/Graphene HPPE
Grip Finish	Micro Foam
Fit Type	Hand-Specific
Length	9.5"
Abrasion Level	ANSI 4
Cut Level	ANSI A4
<div><div>ANSI/ISEA 105</div><div>EN388:2016</div><div>4</div><div>3</div><div>44420</div><div>ABRASION</div><div>CUT</div><div>Oeko TEX</div><div>STANDARD 100</div><div>CE</div></div>	

STANDARDS AND COMPLIANCE
EN ISO 21420: 2020
EN 388: 2016
ASTM D5526
FDA 21 CFR 177.1520
FDA 21 CFR 177.2600
Oeko-Tex Standard 100
ANSI/ISEA 105:2024



CHEMICAL PROTECTION

SW® is advancing materials science and new manufacturing processes to develop chemical protection products with exact safety specifications while maintaining a focus on work comfort and hand health.

NEWTRILE®

HANDLE THE HOSTILE

NewTrile® are the industry's first reusable chemical protection gloves with EcoTek® Sustainable Technology. Advanced chemical protection now has a smaller carbon footprint.



Models & Ordering Information

NEWTRILE® NU11-RD-ECO-GR

11 MIL UNLINED NITRILE CHEMICAL-RESISTANT
GLOVES WITH ECOTEK®

- 11 mil thickness and 13 inch cuff length for added protection.
- EcoTek® sustainable technology
- Case-hardened exterior for enhanced physical and chemical performance.



ORDERING INFORMATION	
N501092	XS: 7
N501093	S: 8
N501094	M: 9
N501095	L: 10
N501096	XL: 11
12 Pairs/Bag 12 Bags/Case	

PHYSICAL PROPERTIES	
Liner Material	Unlined
Material	Nitrile
Cuff Type	Straight
Fit Type	Hand Specific
Length	13"
Palm Thickness	11mil
Tensile Strength Before Aging	20 MPa
Elongation Before Aging	580%
AQL	1.5
<div><div>CE 0493</div><div><div>EN ISO 2016</div><div>ISO 1011X</div></div><div><div>EN ISO 12936</div><div>3001X</div></div><div><div>ISO 15184-2:2016 TYPE A</div><div>1001X</div></div><div><div>ANSI 6</div><div>ABRASION</div></div><div><div>ANSI 2</div><div>PUNCTURE</div></div><div><div>ISO 15184-2:2016 TYPE A</div><div>1001X</div></div><div><div>ISO 15184-2:2016 TYPE A</div><div>1001X</div></div></div>	

STANDARDS AND COMPLIANCE
FDA 21 CFR 177.2600

NEWTRILE® NU15-RD-ECO-GR

15 MIL UNLINED NITRILE CHEMICAL-RESISTANT
GLOVES WITH ECOTEK®

- 15 mil thickness and 13 inch cuff length for added protection.
- EcoTek® sustainable technology
- Case-hardened exterior for enhanced physical and chemical performance.



ORDERING INFORMATION	
N505092	XS: 7
N505093	S: 8
N505094	M: 9
N505095	L: 10
N505096	XL: 11
12 Pairs/Bag 12 Bags/Case	

PHYSICAL PROPERTIES	
Liner Material	Unlined
Material	Nitrile
Cuff Type	Straight
Fit Type	Hand Specific
Length	13"
Palm Thickness	15mil
Tensile Strength Before Aging	20 MPa
Elongation Before Aging	400%
AQL	1.5
<div><div>CE 0493</div><div><div>EN ISO 2016</div><div>ISO 1011X</div></div><div><div>EN ISO 12936</div><div>3001X</div></div><div><div>ISO 15184-2:2016 TYPE A</div><div>1001X</div></div><div><div>ANSI 6</div><div>ABRASION</div></div><div><div>ANSI 2</div><div>PUNCTURE</div></div><div><div>ISO 15184-2:2016 TYPE A</div><div>1001X</div></div><div><div>ISO 15184-2:2016 TYPE A</div><div>1001X</div></div></div>	

STANDARDS AND COMPLIANCE
FDA 21 CFR 177.2600

NEWTRILE® NF15-RD-ECO-GR

15 MIL FLOCK-LINED NITRILE CHEMICAL-RESISTANT
GLOVES WITH ECOTEK®

- 15 mil thickness and 13 inch cuff length for added protection.
- EcoTek® sustainable technology
- Case-hardened exterior for enhanced physical and chemical performance.



ORDERING INFORMATION	
N515092	XS: 7
N515093	S: 8
N515094	M: 9
N515095	L: 10
N515096	XL: 11
12 Pairs/Bag 12 Bags/Case	

PHYSICAL PROPERTIES	
Liner Material	Advanced Flocking
Material	Nitrile
Cuff Type	Straight
Fit Type	Hand Specific
Length	13"
Palm Thickness	15mil
Tensile Strength Before Aging	20 MPa
Elongation Before Aging	300%
AQL	1.5
<div><div>CE 0493</div><div><div>EN ISO 2016</div><div>ISO 1011X</div></div><div><div>EN ISO 12936</div><div>3001X</div></div><div><div>ISO 15184-2:2016 TYPE A</div><div>1001X</div></div><div><div>ANSI 6</div><div>ABRASION</div></div><div><div>ANSI 2</div><div>PUNCTURE</div></div><div><div>ISO 15184-2:2016 TYPE A</div><div>1001X</div></div><div><div>ISO 15184-2:2016 TYPE A</div><div>1001X</div></div></div>	

STANDARDS AND COMPLIANCE
FDA 21 CFR 177.2600

CORES SAFE[®]

NATURAL RUBBER PROTECTION

Coresafe gloves combine natural rubber protection in lined and unlined styles. Experience the comfort, flexibility, and easy donning and doffing of natural rubber for protection against many acids, alkalis, chemicals, gases, and vapors.



CORES SAFE®
Models & Ordering Information

CORES SAFE® F28O
NATURAL RUBBER CHEMICAL-RESISTANT GLOVES
FLOCK-LINED

- Orange natural rubber latex
- 28mil thick and 13” length for protection
- Raised Diamond grip pattern
- Flock-lined for donning and comfort
- Double chlorinated inner & outer surfaces
- 12 pairs per poly bag, 12 poly bags per case



ORDERING INFORMATION	
L519012	XS: 7
L519013	S: 8
L519014	M: 9
L519015	L: 10
12 Pairs/Bag 12 Bags/Case	

PHYSICAL PROPERTIES	
Liner Material	Advanced Flocking
Material	Latex
Cuff Type	Straight
Fit Type	Hand Specific
Length	13"
Palm Thickness	28mil
Tensile Strength Before Aging	10 MPa
Tensile Strength After Aging	7.5 MPa
Elongation Before Aging	500%
Elongation After Aging	375%
AQL	2.5
CE 0493 ISO 14001:2015 ANSI 3 ABRASION ANSI 2 PUNCTURE	

STANDARDS AND COMPLIANCE
FDA 21 CFR 177.2600

CORES SAFE® F28YB
NATURAL RUBBER & NEOPRENE CHEMICAL-RESISTANT
GLOVES FLOCK-LINED

- 2-Layer / 2-Color blue neoprene over yellow latex
- 28mil thick and 13” length for protection
- Embossed raised-diamond surface for wet/dry grip
- Flock-lined for donning and comfort
- Double chlorinated inner & outer surfaces
- 12 pairs per poly bag, 12 poly bags per case



ORDERING INFORMATION	
T519252	XS: 7
T519253	S: 8
T519254	M: 9
T519255	L: 10
12 Pairs/Bag 12 Bags/Case	

PHYSICAL PROPERTIES	
Liner Material	Advanced Flocking
Material	Latex/Neoprene
Cuff Type	Straight
Fit Type	Hand Specific
Length	13"
Palm Thickness	28mil
Tensile Strength Before Aging	10 MPa
Tensile Strength After Aging	7.5 MPa
Elongation Before Aging	500%
Elongation After Aging	375%
AQL	2.5
CE 0493 ISO 14001:2015 ANSI 3 ABRASION ANSI 1 PUNCTURE	

STANDARDS AND COMPLIANCE
FDA 21 CFR 177.2600

CORES SAFE® U17N
NATURAL RUBBER CHEMICAL-RESISTANT GLOVES
UNLINED

- Natural rubber latex
- 17mil thick and 12” length for protection
- Fish scale grip pattern
- Unlined for donning and comfort
- Double chlorinated inner & outer surfaces
- 12 pairs per poly bag, 12 poly bags per case



ORDERING INFORMATION	
L507032	XS: 7
L507033	S: 8
L507034	M: 9
L507035	L: 10
12 Pairs/Bag 12 Bags/Case	

PHYSICAL PROPERTIES	
Liner Material	Unlined
Material	Latex
Cuff Type	Straight
Fit Type	Hand Specific
Length	12"
Palm Thickness	17mil
Tensile Strength Before Aging	10 MPa
Tensile Strength After Aging	7.5 MPa
Elongation Before Aging	500%
Elongation After Aging	375%
AQL	2.5
CE 0493 ISO 14001:2015 ANSI 3 ABRASION ANSI 1 PUNCTURE	

STANDARDS AND COMPLIANCE
FDA 21 CFR 177.2600

CORES SAFE[®]

Models & Ordering Information

CORES SAFE[®] F13Y







NATURAL RUBBER CHEMICAL-RESISTANT GLOVES

FLOCK-LINED

- Yellow natural rubber latex
- 13mil thick and 12” length for protection
- Fish scale grip pattern
- Flock-lined for donning and comfort
- Double chlorinated inner & outer surfaces
- 12 pairs per poly bag, 12 poly bags per case



ORDERING INFORMATION	
L513002	XS: 7
L513003	S: 8
L513004	M: 9
L513005	L: 10
12 Pairs/Bag 12 Bags/Case	

PHYSICAL PROPERTIES	
Liner Material	Cotton Flock
Material	Natural Rubber Latex
Cuff Type	Straight
Fit Type	Hand Specific
Length	12"
Palm Thickness	13mil
Tensile Strength Before Aging	10 MPa
Tensile Strength After Aging	7.5 MPa
Elongation Before Aging	500%
Elongation After Aging	375%
AQL	2.5
CE 0493       	

STANDARDS AND COMPLIANCE
FDA 21 CFR 177.2600

CORES SAFE[®] PC-F22B

NATURAL RUBBER CHEMICAL-RESISTANT GLOVES

FLOCK-LINED

- 22mil thick and 12.6 inch cuff length for added protection
- Embossed fish scale pattern for wet/dry grip
- Case Hardened for enhanced physical and chemical performance while providing easier and more comfortable donning and doffing
- 12 pairs per poly bag, 12 poly bags per case



ORDERING INFORMATION	
L518071	XS: 6
L518072	S: 7
L518073	M: 8
L518074	L: 9
L518075	XL: 10
L518076	2XL: 11
2 Pairs/Roll 6 Rolls/Bag 12 Bags/Case	



PHYSICAL PROPERTIES	
Liner Material	Cotton Flock
Material	Natural Rubber Latex
Cuff Type	Straight
Fit Type	Hand Specific
Length	12.6"
Palm Thickness	21.6 mil
CE 0598       	

STANDARDS AND COMPLIANCE
FDA 21 CFR 177.2600

UNDERSTANDING CUT STANDARDS


EN388
EUROPEAN STANDARD

Uses Coup Test as well as the TDM-100 cut machine to test cut level (ISO 13997)

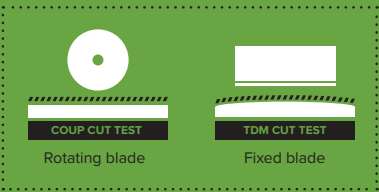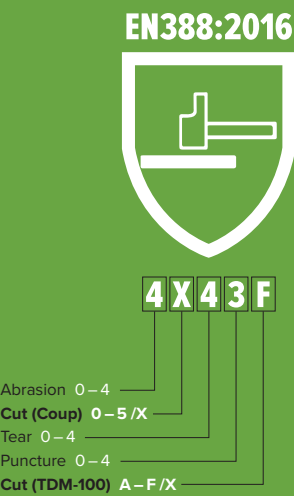

ANSI
U.S. STANDARD

Uses TDM-100 cut machine to test cut level (ISO 13997)

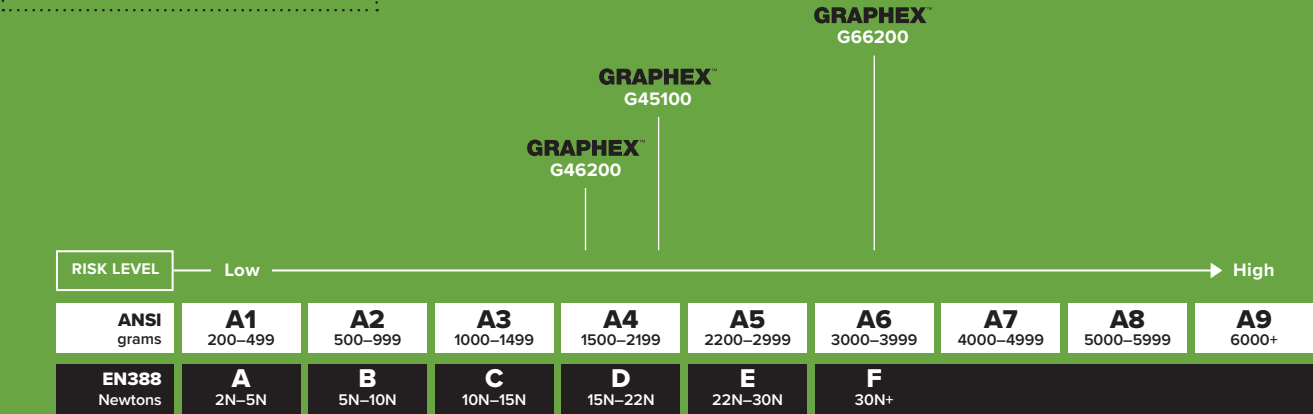

COMPARING ANSI/EN388 CUT LEVELS

UNDERSTANDING CHEMICAL STANDARDS


EN374-5

Indicates glove has passed test methods to protect against micro-organisms and fungi.



ISO 374-1

Specifies resistance to chemical permeation.

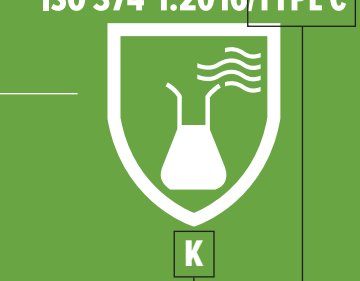

Code A – R: glove resistance against specific chemicals

Code	Chemical	CAS number	Class
A	Methanol	67-56-1	Primary alcohol
B	Acetone	67-64-1	Ketone
C	Acetonitrile	75-05-8	Nitrile composite
D	Dichloromethane	75-09-2	Chlorinated hydrocarbon
E	Carbon disulphide	75-15-0	Organic compound containing sulphur
F	Toluene	108-88-3	Aromatic hydrocarbon
G	Diethylamine	109-89-7	Amine
H	Tetrahydrofuranne	109-99-9	Heterocyclic ether compound
I	Ethyl acetate	141-78-6	Ester
J	n-Heptane	142-82-5	Saturated hydrocarbon
K	Sodium hydroxide 40%	1310-73-2	Inorganic base
L	Sulfuric acid 96%	7664-93-9	Inorganic mineral acid, oxidising
M	Nitric acid 65%	7697-37-2	Inorganic mineral acid, oxidising
N	Acetic acid 99%	64-19-7	Organic acid
O	Ammonia 25%	1336-21-6	Organic base
P	Hydrogen Peroxide 30%	7722-84-1	Peroxide
Q	Hydrofluoric acid 40%	7664-39-3	Inorganic mineral acid
R	Formaldehyde 37%	50-00-0	Aldehyde

Type A – C: time before chemical breakthrough at the molecular level

Protection type	Chemical breakthrough time
TYPE A	30 minutes (level 2) against minimum 6 test chemicals
TYPE B	30 minutes (level 2) against minimum 3 test chemicals
TYPE C	10 minutes (level 1) against minimum 1 test chemical

Glove Size Selection

THE RIGHT GLOVE IS THE RIGHT SIZE.

FIT FOR COMFORT: SINGLE-USE


Selecting the right size glove is essential for optimal performance. A glove that fits too snugly put strains on the small hand muscles, which leads to hand fatigue and discomfort.

Don a glove, and with your fingers stretched out, press the center of your palm with your other hand. If the glove is too tight, you will feel resistance and/or an air pocket between the glove and your palm.



ALL SW® GLOVES

To get an estimate of the correct size glove, measure the widest part of your hand with the chart to the right. Measure from the saddle of the thumb and index finger to the opposite side of your hand.

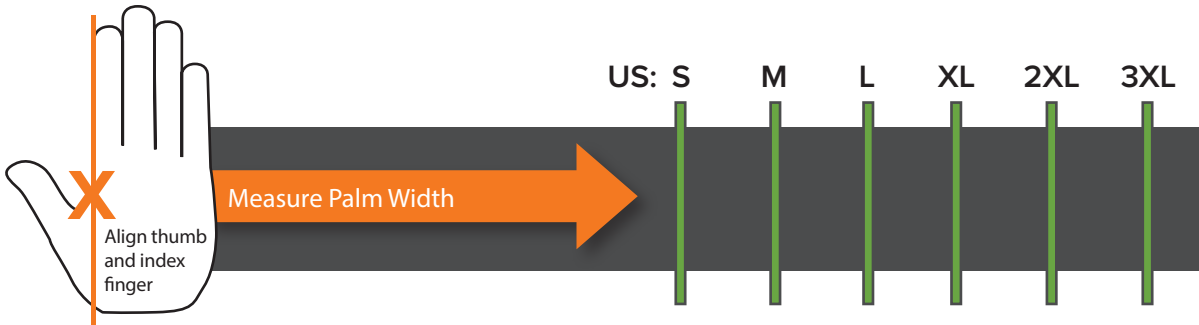

Specification Guide

Part Number	Product Name	Color	Finger Mil	Palm Mil	Weight	Outer Surface	AQL	Packaging	Page		
Single-Use Powder Free Nitrile Exam											
L00620X	TF-065-095NT	Natural	5.5mil	4.7mil	6.5g	Fully Textured	1.5	100/Bx 1000/Cs	20		
N30134X	TF-95RB	Royal Blue	4.7mil	3.1mil	5.0g	Finger Textured	1.5	100/Bx 1000/Cs	20		
N02740X	TF-12LG	Light Green	5.9mil	4.9mil	7.5g	Fully Textured	1.5	100/Bx 1000/Cs	20		
N02840X	TF-95LG	Light Green	4.0mil	3.6mil	5.0g	Finger Textured	1.5	100/Bx 1000/Cs	22		
N19134X	TF-95NV	Navy	3.5mil	2.4mil	3.8g	Finger Textured	1.5	200/Bx 2000/Cs	22		
N19188X	TF-95BK	Black	3.5mil	2.4mil	3.8g	Finger Textured	1.5	200/Bx 2000/Cs	22		
N09134X	TF-95BL	Blue	3.5mil	2.4mil	3.8g	Finger Textured	1.5	250/Bx 2500/Cs	24		
N20075X	PF-95HO	Hi-Viz	5.5mil	5.0mil	6.5g	Finger Textured	1.5	100/Bx 1000/Cs	30		
N20041X	PF-95LG	Light Green	5.5mil	5.0mil	6.5g	Finger Textured	1.5	100/Bx 1000/Cs	30		
N71688X	PF-95BK	Black	5.6mil	5.0mil	6.5g	Fully Textured	1.5	100/Bx 1000/Cs	30		
N20036X	PF-95TL	Teal	5.8mil	5.0mil	6.5g	Fully Textured	1.5	100/Bx 1000/Cs	32		
N18947X	PF-95GW	Green / White	5.9mil	4.9mil	6.5g	Fully Textured	1.5	50/Bx 500/Cs	32		
N70034X	PF-95IN	Indigo	5.9mil	5.0mil	6.5g	Finger Textured	1.5	100/Bx 1000/Cs	32		
N99175X	PF-95OR	Orange	5.9mil	5.1mil	7.5g	Fully Textured	1.5	100/Bx 1000/Cs	34		
N10655X	PF-95BL	Blue	6.9mil	6.1mil	8.5g	Fully Textured	1.5	50/Bx 500/Cs	34		
N26050X	PF-95GY	Gray	8.2mil	6.2mil	8.8g	Fully Textured	1.5	50/Bx 500/Cs	34		
N12736X	PF-12TL	Teal	7.1mil	6.2mil	10.7g	Fully Textured	1.5	50/Bx 500/Cs	36		
N18817X	PF-12WG	White / Green	7.0mil	6.0 mil	10.3g	Fully Textured	1.5	100/Bx 1000/Cs	36		
N90975X	PF-12OR	Orange	11.2mil	8.0mil	13.3g	Fully Textured	1.5	50/Bx 500/Cs	36		
N90955X	PF-12BL	Blue	11.2mil	8.0mil	13.3g	Fully Textured	1.5	50/Bx 500/Cs	38		
N26088X	MM-11BK	Black	10.1mil	8.5mil	12.8g	Fully Textured	1.5	50/Bx 500/Cs	48		
Thermoplastic Elastomer (TPE)											
P70010X	P-021-098-WT	White	2.1mil	2.1mil	2.1g	Smooth	4.0	200/Bx 1000/Cs	52		
P79010X	P-024-098-ECO-WT	White	3.2mil	3.2mil	2.4g	Smooth	1.5	200/Bx 1000/Cs	52		
Single-Use Powder Free Neoprene Exam											
K00040X	PC-045-095GR	Green	3.5mil	2.8mil	4.4g	Fully Textured	1.5	100/Bx 1000/Cs	44		
K00140X	PC-95GR	Green	6.2mil	4.7mil	7.9g	Fully Textured	1.5	100/Bx 1000/Cs	44		
Single Use Cleanroom Nitrile Exam											
N42710X	PC-12WT	White	6.2mil	5.0mil	8.0g	Finger Textured	1.5	100/Bx 1000/Cs	44		
Part Number	Product Name	Liner Material	Coating Material	Color	Cut Level	Abrasion Level	Gauge	Grip Finish	Fit Type	Packaging	Page
Cut-Resistant											
G45100X	GraphEx® G45100	AxiFybr®	Nitrile	Gray / Black	ANSI A4	ANSI 5	18	Smooth	Hand Specific	12 Pairs/Bag, 6 Bags/Cs	58
G46200X	GraphEx® G46200	AxiFybr®	Nitrile	Gray / Black	ANSI A4	ANSI 6	18	Sandy	Hand Specific	12 Pairs/Bag, 6 Bags/Cs	58
G66200X	GraphEx® G66200	AxiFybr®	Nitrile	Gray / Black	ANSI A6	ANSI 6	18	Sandy	Hand Specific	12 Pairs/Bag, 6 Bags/Cs	58
C24465X	KarbonHex KX70	Knitted Fleece	Latex	Gray / Black	ANSI A2	ANSI 4	10	Sandy	Hand-Specific	12 Pairs/Bag, 6 Bags/Cs	62
C33461X	KarbonHex KX84V	Knitted Fleece	Latex	Gray / Yellow	ANSI A3	ANSI 3	10	Sandy	Hand-Specific	12 Pairs/Bag, 6 Bags/Cs	62
C36590X	KarbonHex KX10	HPPE +	Nitrile / PU	Gray / Black	ANSI A3	ANSI 6	18	Micro Foam (Pitted)	Hand-Specific	12 Pairs/Bag, 6 Bags/Cs	62
C16400X	KarbonHex KX41	Nylon / Spandex	Nitrile	Gray / Black	ANSI A1	ANSI 6	18	Sandy	Hand-Specific	12 Pairs/Bag, 6 Bags/Cs	64
C16207X	KarbonHex KX42	Nylon / Spandex	Nitrile	Gray / Black	ANSI A1	ANSI 6	15	Sandy	Hand-Specific	12 Pairs/Bag, 6 Bags/Cs	64
C16677X	KarbonHex KX43A	Nylon / Spandex	Nitrile	Gray / Black	ANSI A1	ANSI 6	15	Sandy	Hand-Specific	6 Pairs/Bag, 6 Bags/Cs	64
C44280X	KarbonHex KX80	HPPE +	Nitrile	Gray / Black	ANSI A4	ANSI 4	18	Sandy	Hand-Specific	12 Pairs/Bag, 6 Bags/Cs	66
C44270X	KarbonHex KX90	HPPE +	Nitrile	Gray / Black	ANSI A4	ANSI 4	18	Sandy	Hand-Specific	6 Pairs/Bag, 6 Bags/Cs	66
C14100X	TotalForm TF-14BK	Nylon / Spandex	Nitrile	Gray / Black	ANSI A1	ANSI 4	18	Micro Foam	Hand-Specific	12 Pairs/Bag, 6 Bags/Cs	72
C44100X	TotalForm TF-44BK	Nylon/Spandex	Nitrile	Gray / Black	ANSI A4	ANSI 4	18	Micro Foam	Hand-Specific	12 Pairs/Bag, 6 Bags/Cs	72
Part Number	Product Name	Liner Material	Coating Material	Color	Puncture Level	Abrasion Level	Grip Finish		Fit Type	Packaging	Page
Chemical-Resistant - Nitrile											
N50109X	NewTrile® U11	N/A	N/A	Green	ANSI 2	ANSI 6	Recessed Diamond		Hand Specific	12 Pairs/Bag, 12 Bags/Cs	78
N50509X	NewTrile® U15	N/A	N/A	Green	ANSI 3	ANSI 6	Recessed Diamond		Hand Specific	12 Pairs/Bag, 12 Bags/Cs	78
N51509X	NewTrile® F15	Advanced Flocking	N/A	Green	ANSI 3	ANSI 6	Recessed Diamond		Hand Specific	12 Pairs/Bag, 12 Bags/Cs	78
Chemical-Resistant - Natural Rubber Latex											
L50703X	CoreSafe® U17N	N/A	N/A	Natural	ANSI 1	ANSI 3	Fish Scale		Hand Specific	12 Pairs/Bag, 12 Bags/Cs	82
L51901X	CoreSafe® F280	Cotton Flock	N/A	Orange	ANSI 2	ANSI 3	Raised Diamond		Hand Specific	12 Pairs/Bag, 12 Bags/Cs	82
T51925X	CoreSafe® F28YB	Cotton Flock	Neoprene	Yellow / Blue	ANSI 1	ANSI 3	Raised Diamond		Hand Specific	12 Pairs/Bag, 12 Bags/Cs	82
L51807X	PowerChem® F22B	Cotton Flock	N/A	Blue	ANSI 2	ANSI 3	Sandy		Hand Specific	12 Pairs/Bag, 12 Bags/Cs	84
L51300X	CoreSafe® F13Y	Cotton Flock	N/A	Yellow	ANSI 1	ANSI 3	Fish Scale		Hand Specific	12 Pairs/Bag, 12 Bags/Cs	84



swssglobal.com



v.112025.1