



FEEL THE SW DIFFERENCE®

DESIGNED TO ENHANCE WORKER PERFORMANCE.

PowerForm®


PF-106-110-TTK/BAL/ECO-GR/YW

POWDER-FREE ECOTEK® BIODEGRADABLE NITRILE SINGLE-USE GLOVES WITH TRACTEK® AND BREACH ALERT™*

(PowerForm® S8+)

WORK WITH CONFIDENCE IN RUGGED, WET AND OILY CONDITIONS WITH TRACTEK® AND BREACH ALERT™ PROTECTION

- TracTek® Grip Technology is engineered to maximize surface contact and channel away liquids
- Breach Alert™ Visual Detection Technology provides durable 2-ply construction and contrasting inner color
- EcoTek® Biodegradability Technology accelerates landfill breakdown without any performance loss*
- Silicone-free for critical environments
- Exceeds 1.5 AQL laboratory standards

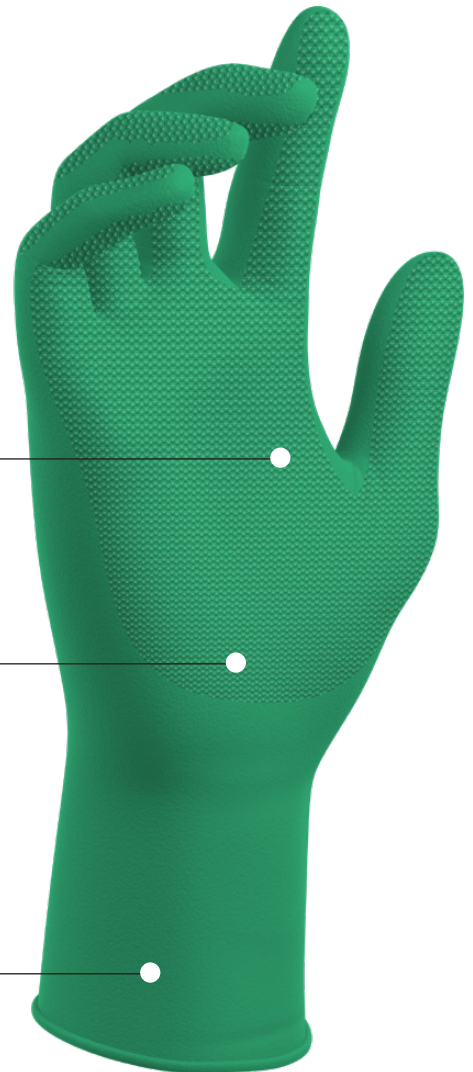





ANSI Level 2
Puncture resistance

Extended cuff
for added splash
protection

Tear-resistant
beaded cuff for
easy donning

PF PF-106-110-TTK/BAL/ECO-GR/YW

WEIGHT	LENGTH	THICKNESS	FEATURES	COLOR
 10.6g (large size)	 11.0"	 5.5 mil	TracTek® Breach Alert™ EcoTek®	 GREEN YELLOW

ECOTEK

TracTek® BreachAlert™ EcoTek®



SW®
33278 Central Avenue, Unit 102, Union City, CA 94587, USA
Tel: +1.510.429.8692 | Fax: +1.510.487.5347

Trademarks and registered trademarks are the property of SW and its affiliates.
©2021 SW. All rights reserved.



TECHNICAL DATA



PF-106-110-TTK/BAL/ECO-GR/YW

POWDER-FREE ECOTEK® BIODEGRADABLE NITRILE SINGLE-USE GLOVES WITH TRACTEK® AND BREACH ALERT™*

(PowerForm® S8+)



PRODUCT DESCRIPTION

SPECIFICATIONS

PRODUCT	PowerForm®		
GRADE	Powder-Free Industrial		
MATERIAL	Nitrile		
THICKNESS	FINGER	7.0mil	0.18mm
	PALM	5.5mil	0.14mm
	CUFF	4.5mil	0.11mm
COLOR	OUTER	Green	
	INNER	Yellow	
SURFACE	OUTER	TracTek®	
	INNER	Breach Alert™	
LENGTH	11.0"	280mm	
WEIGHT	10.6g		
FIT TYPE	Ambidextrous		
CUFF TYPE	Beaded		
WATERTIGHT AQL	1.5		
ORIGIN COUNTRY	China		

PHYSICAL PROPERTIES

	PRE-AGING	POST-AGING
TENSILE STRENGTH:	21 MPa	19 MPa
ELONGATION:	560%	550%

INTEGRATED TECHNOLOGIES

TRACTEK® Grip Technology: Provides a high-density pattern maximizes grip in wet or oily conditions.

BREACH ALERT™ Visual Detection Technology: 2-ply construction provides the enhanced durability of a glove engineered with two distinct polymer layers combined with contrasted interior color.

ECOTEK® Biodegradability Technology: 92.6% biodegradable in 2.5 years. ASTM D5526-12 test results do not predict future biodegradation.*

100% Air Inspected


Clean Washed

* Specifications based on size Large glove

STANDARDS & CERTIFICATIONS

EN 420-2003
ANSI/ISEA 105-2016
REACH EU 1907/2006
EU 2016/425
CAT III COMPLEX DESIGN

FDA 21 CFR 177.2600
Component materials comply with FDA regulations for food contact

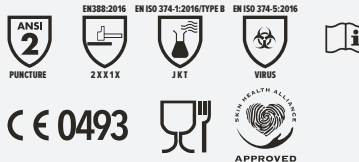

Please visit swsafety.com/symbols for information on standards used on this document.

ORDERING

ITEM NO.	SIZE	PALM WIDTH	PACKAGING
N807712	S 6½ – 7	3.7" 95mm	50 gloves per box 10 boxes per case
N807713	M 7½ – 8	3.9" 100mm	50 gloves per box 10 boxes per case
N807714	L 8½ – 9	4.1" 104mm	50 gloves per box 10 boxes per case
N807715	XL 9½ – 10	4.5" 114mm	50 gloves per box 10 boxes per case
N807716	2XL 10½ – 11	4.9" 124mm	50 gloves per box 10 boxes per case
N807717	3XL 11½ – 12	5.2" 133mm	50 gloves per box 10 boxes per case

APPLICATIONS

- Assembly
- Chemical Handling
- Fabrication
- Food Handling and Packaging
- Janitorial Maintenance
- Light Machining Operations
- Liquid Handling
- Maintenance
- Oily or Wet Surfaces
- Painting
- Waste Management

Keep out of sunlight. Store in a cool, dry place. Keep away from sources of ozone or ignition.



R_N80771X0320



SW®
33278 Central Avenue, Unit 102, Union City, CA 94587, USA
Tel: +1.510.429.8692 | Fax: +1.510.487.5347

Trademarks and registered trademarks are the property of SW and its affiliates. ©2021 SW. All rights reserved.



*Under test method ASTM D5526-12, a standard test method for determining anaerobic biodegradation of plastics in accelerated landfill conditions. Current biodegradation results do not predict future results.