



FEEL THE SW DIFFERENCE®

# DESIGNED TO ENHANCE WORKER PERFORMANCE.


## PowerForm®

PF-11GY

POWDER-FREE ECOTEK BIODEGRADABLE NITRILE SINGLE-USE GLOVES WITH TRACTEK AND BREACH ALERT\*

### WORK WITH CONFIDENCE IN RUGGED, WET AND OILY CONDITIONS WITH TRACTEK® AND BREACH ALERT® PROTECTION

- TracTek® Grip Technology is engineered to maximize surface contact and channel away liquids
- Breach Alert® Visual Detection Technology provides durable 2-ply construction and contrasting inner color
- EcoTek® Biodegradability Technology accelerates landfill breakdown without any performance loss\*
- Silicone-free for critical environments
- Exceeds 1.5 AQL laboratory standards

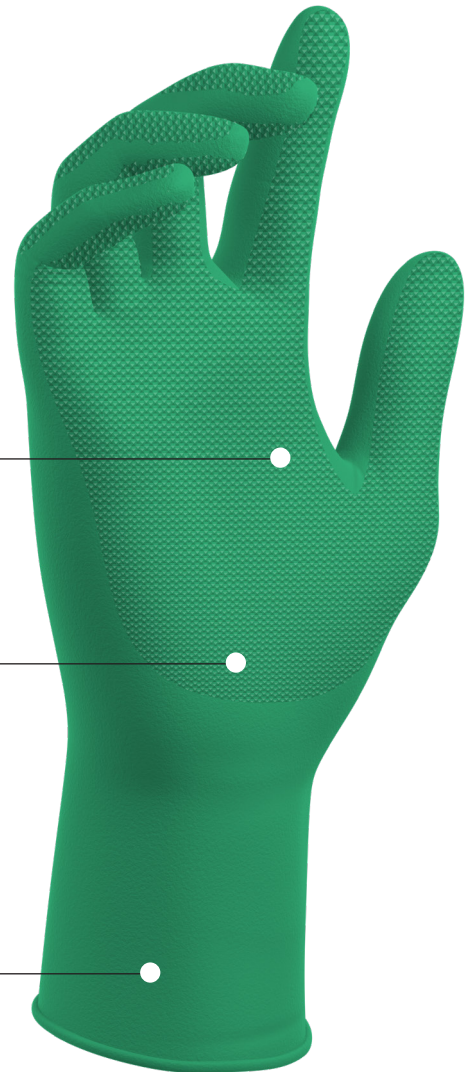





ANSI Level 2  
Puncture resistance

Extended cuff  
for added splash  
protection

Tear-resistant  
beaded cuff for  
easy donning

**PF** **PF-11GY**

WEIGHT	LENGTH	THICKNESS	FEATURES	COLOR
 10.6g (large size)	 11.0"	 5.5 mil	TracTek® Breach Alert™	 GREEN YELLOW



SW®  
33278 Central Avenue, Unit 102, Union City, CA 94587, USA  
Tel: +1.510.429.8692 | Fax: +1.510.487.5347

Trademarks and registered trademarks are the property of SW and its affiliates.  
©2022 SW. All rights reserved.



# TECHNICAL DATA



## PF-11GY

POWDER-FREE ECOTEK BIODEGRADABLE NITRILE SINGLE-USE GLOVES WITH TRACTEK AND BREACH ALERT®\*

### PRODUCT DESCRIPTION

#### SPECIFICATIONS

<b>PRODUCT</b>	PowerForm®		
<b>GRADE</b>	Powder-Free Industrial		
<b>MATERIAL</b>	Nitrile		
<b>THICKNESS</b>	<b>FINGER</b>	7.0mil	0.18mm
	<b>PALM</b>	5.5mil	0.14mm
	<b>CUFF</b>	4.5mil	0.11mm
<b>COLOR</b>	<b>OUTER</b>	Green	
	<b>INNER</b>	Yellow	
<b>SURFACE</b>	<b>OUTER</b>	TracTek®	
	<b>INNER</b>	Breach Alert®	
<b>LENGTH</b>	11.0"	280mm	
<b>WEIGHT</b>	10.6g		
<b>FIT TYPE</b>	Ambidextrous		
<b>CUFF TYPE</b>	Beaded		
<b>WATERTIGHT AQL</b>	1.5		
<b>ORIGIN COUNTRY</b>	China		

\* Specifications based on size Large glove

#### PHYSICAL PROPERTIES

	PRE-AGING	POST-AGING
<b>TENSILE STRENGTH:</b>	21 MPa	19 MPa
<b>ELONGATION:</b>	560%	550%

#### INTEGRATED TECHNOLOGIES

**TRACTEK** Grip Technology: Provides a high-density pattern maximizes grip in wet or oily conditions.

**BREACH ALERT** Visual Detection Technology: 2-ply construction provides the enhanced durability of a glove engineered with two distinct polymer layers combined with contrasted interior color.

**ECOTEK** Biodegradability Technology: 92.6% biodegradable in 2.5 years. ASTM D5526-12 test results do not predict future biodegradation.\*

100% Air Inspected

Clean Washed



### STANDARDS & CERTIFICATIONS

EN ISO 21420:2020  
EN 455-2000-2015  
ASTM D6319-19  
ASTM F1671-13  
ASTM F739-12  
Reach EU 1907/2006  
EU 2016/425

ANSI/ISEA 105-2016  
CAT III Complex Design  
UL NFPA 1999-2018  
FDA 21 CFR 177.2600



Please visit [swsafety.com/symbols](http://swsafety.com/symbols) for information on standards used on this document.

### ORDERING

ITEM NO.	SIZE	PALM WIDTH	PACKAGING
N807712	S 6½ – 7	3.7" 95mm	50 gloves per box 10 boxes per case
N807713	M 7½ – 8	3.9" 100mm	50 gloves per box 10 boxes per case
N807714	L 8½ – 9	4.1" 104mm	50 gloves per box 10 boxes per case
N807715	XL 9½ – 10	4.5" 114mm	50 gloves per box 10 boxes per case
N807716	2XL 10½ – 11	4.9" 124mm	50 gloves per box 10 boxes per case
N807717	3XL 11½ – 12	5.2" 133mm	50 gloves per box 10 boxes per case

### APPLICATIONS

#### INDUSTRIAL

- Assembly
- Fabrication
- Food handling and packaging
- Janitorial maintenance
- Light machining operations
- Liquid handling
- Maintenance
- Oily or wet surfaces
- Painting
- Waste management

#### MEDICAL

- Chemical handling

Keep out of sunlight. Store in a cool, dry place. Keep away from sources of ozone or ignition.



R\_N80771X1121



SW®  
33278 Central Avenue, Unit 102, Union City, CA 94587, USA  
Tel: +1.510.429.8692 | Fax: +1.510.487.5347

Trademarks and registered trademarks are the property of SW and its affiliates.  
©2022 SW. All rights reserved.



\*Under test method ASTM D5526-12, a standard test method for determining anaerobic biodegradation of plastics in accelerated landfill conditions. Current biodegradation results do not predict future results.