



FEEL THE SW DIFFERENCE®

DESIGNED TO ENHANCE WORKER PERFORMANCE.

PowerForm®





PF-95GW

POWDER-FREE ECOTEK® BIODEGRADABLE NITRILE EXAMINATION GLOVES WITH ENERGEL™ AND BREACH ALERT™*

EXPERIENCE ENERGEL® INFUSED GLOVES, DESIGNED TO HYDRATE SKIN AND PROTECT AGAINST LONG-TERM GLOVE USAGE

- EnerGel™ Hand Conditioning Technology clinically proven to hydrate and soothe skin
- Breach Alert™ Visual Detection Technology provides durable 2-ply construction and contrasting inner color
- EcoTek® Biodegradability Technology accelerates landfill breakdown without any performance loss*
- Proven resistance to fentanyl and gastric acid for over 4 hours to replicate hazardous settings and overdose conditions*
- Silicone-free for critical environments
- Exceeds 1.5 AQL laboratory standards

PF PF-95GW


WEIGHT	LENGTH	THICKNESS	FEATURES	COLOR
 6.5g (large size)	 9.5"	 4.9 mil	EnerGel™ Breach Alert™ EcoTek®	 GREEN WHITE

ECOTEK

Optimal thickness for durability and tactile sensitivity

Fully textured surface for wet and dry grip

Tear-resistant beaded cuff for easy donning

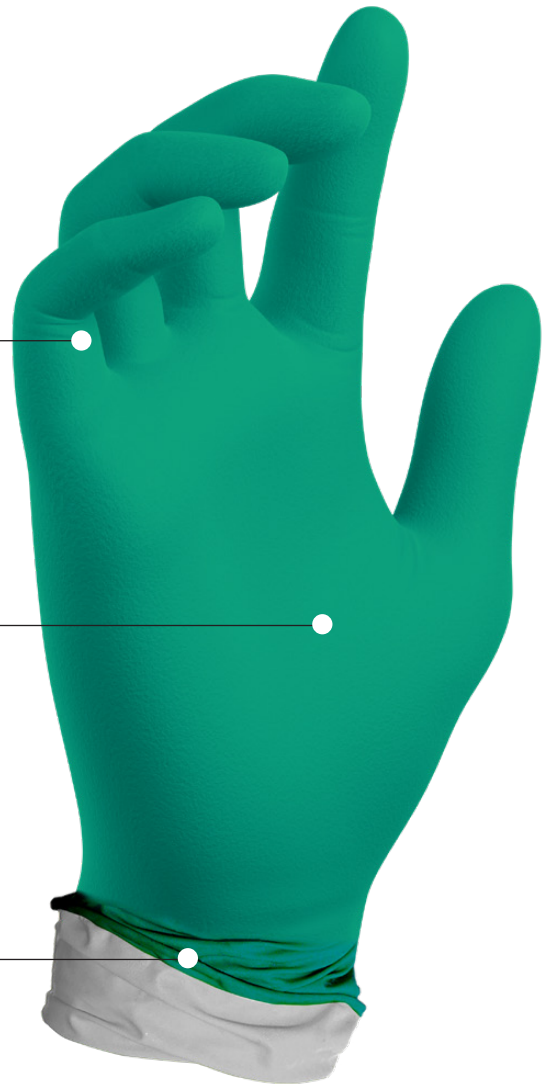

EnerGel™ EcoTek® BreachAlert™



SW®
33278 Central Avenue, Unit 102, Union City, CA 94587, USA
Tel: +1.510.429.8692 | Fax: +1.510.487.5347

Trademarks and registered trademarks are the property of SW and its affiliates.
©2021 SW. All rights reserved.



*Using ASTM D6978

TECHNICAL DATA



PF-95GW

POWDER-FREE ECOTEK® BIODEGRADABLE
NITRILE EXAMINATION GLOVES WITH ENERCEL™
AND BREACH ALERT™*

PRODUCT DESCRIPTION

SPECIFICATIONS

PRODUCT	PowerForm®		
GRADE	Powder-Free Exam		
MATERIAL	Nitrile		
THICKNESS	FINGER	5.9mil	0.15mm
	PALM	4.9mil	0.13mm
	CUFF	3.8mil	0.10mm
COLOR	OUTER	Green	
	INNER	White	
SURFACE	OUTER	Fully Textured	
	INNER	EnerGel™	
LENGTH	9.5"	242mm	
WEIGHT	6.5g		
FIT TYPE	Ambidextrous		
CUFF TYPE	Beaded		
WATERTIGHT AQL	1.5		
ORIGIN COUNTRY	China		

Specifications based on size Large glove

PHYSICAL PROPERTIES

	PRE-AGING	POST-AGING
TENSILE STRENGTH:	18 MPa	18 MPa
ELONGATION:	550%	500%

INTEGRATED TECHNOLOGIES

ENERCEL™ Hand Conditioning Technology: allows for thorough penetration of Aloe Vera into the skin, reduces water loss to retain moisture and has been clinically proven to prevent many skin ailments, like dermatitis.

ECOTEK® Biodegradability Technology: 92.6% biodegradable in 2.5 years. ASTM D5526-12 test results do not predict future biodegradation.*

BREACH ALERT™ Visual Detection Technology: provides durable 2-ply construction and contrasting inner color



STANDARDS & CERTIFICATIONS

EN 420:2003 CAT III COMPLEX DESIGN
EN 455:2000-2015 FDA 21 CFR 177.2600
ASTM D6319-10
ASTM D6978
EU 2016/425



Please visit swsafety.com/symbols for information on standards used on this document.

ORDERING

ITEM NO.	SIZE	PALM WIDTH	PACKAGING
N189471	XS 5½ – 6	2.7" 70mm	50 gloves per box 10 boxes per case
N189472	S 6½ – 7	3.1" 79mm	50 gloves per box 10 boxes per case
N189473	M 7½ – 8	3.5" 89mm	50 gloves per box 10 boxes per case
N189474	L 8½ – 9	4.1" 104mm	50 gloves per box 10 boxes per case
N189475	XL 9½ – 10	4.5" 114mm	50 gloves per box 10 boxes per case
N189476	2XL 10½ – 11	4.9" 124mm	50 gloves per box 10 boxes per case

APPLICATIONS

- Agriculture
- Hydroponics
- Assembly
- Chemical Handling
- Clinical
- Laboratory
- Liquid Handling
- Pharma Production

Keep out of sunlight. Store in a cool, dry place.
Keep away from sources of ozone or ignition.



R_N18947X0421



SW®
33278 Central Avenue, Unit 102, Union City, CA 94587, USA
Tel: +1.510.429.8692 | Fax: +1.510.487.5347

Trademarks and registered trademarks are the property of SW and its affiliates.
©2021 SW. All rights reserved.



*Under test method ASTM D5526-12, a standard test method for determining anaerobic biodegradation of plastics in accelerated landfill conditions. Current biodegradation results do not predict future results.