



FEEL THE SW
DIFFERENCE™

FOCUSED ON QUALITY, COMFORT, AND DEXTERITY




TF-090-095-TTK-NT

TRACTEK HIGH-PERFORMANCE GRIP POWDER-FREE
LATEX EXAMINATION GLOVES

Previously known as Hypersense® X9

NOTHING GETS THE SLIP ON YOU WHEN YOU'RE WEARING THESE HIGH-PERFORMANCE GRIP GLOVES DESIGNED TO PROVIDE BARRIER PROTECTION AGAINST CHEMICALS, PATHOGENS AND MORE WHEN YOU NEED TO MAXIMIZE DEXTERITY.

- TracTek® Grip Technology is engineered to maximize surface contact and channel away liquids
- High tactile sensitivity and comfort of natural latex
- Natural latex provides advanced chemical protection
- Helps prevent skin irritation and sample contamination
- Optimal thickness for durability and tactile sensitivity
- Tear-resistant beaded cuff eases donning
- 1.5 AQL exceeds laboratory standards
- SHA Dermatologically Approved

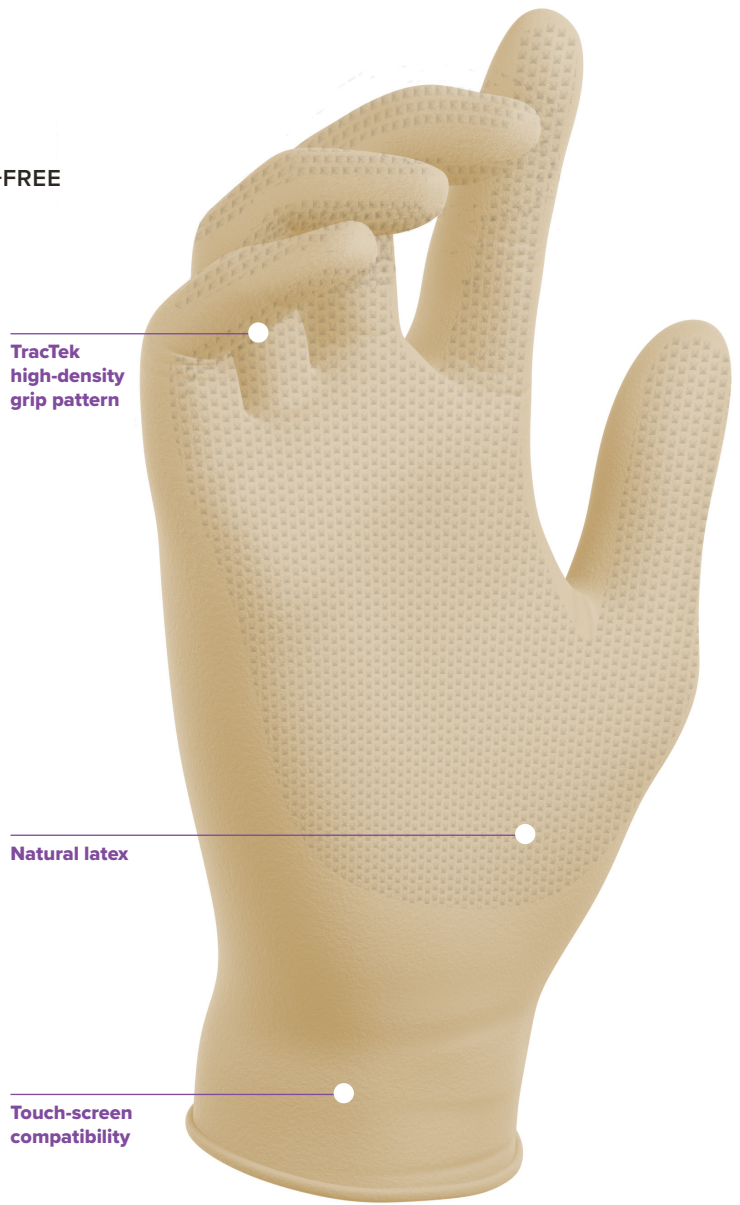

TracTek
high-density
grip pattern

Natural latex

Touch-screen
compatibility

TF TF-090-095-TTK-NT

WEIGHT	LENGTH	THICKNESS	FEATURES	COLOR
9.0g (large size)	9.5"	6.3 mil	TracTek®	NATURAL



SW Safety Solutions Inc.
33278 Central Avenue, Unit 102, Union City, CA 94587, USA
Tel: +1.510.429.8692 | Fax: +1.510.487.5347

Trademarks and registered trademarks are the property of SW Safety Solutions Inc. and its affiliates.
©2019 SW Safety Solutions Inc. All rights reserved.



TECHNICAL DATA



TF-090-095-TTK-NT

TRACTEK HIGH-PERFORMANCE GRIP POWDER-FREE LATEX EXAMINATION GLOVES

Previously known as Hypersense® X9



PRODUCT DESCRIPTION

SPECIFICATIONS

PRODUCT	TrueForm
GRADE	Powder-Free Exam
MATERIAL	Latex
THICKNESS	FINGER 7.0mil 0.18mm
	PALM 6.3mil 0.16mm
	CUFF 4.9mil 0.13mm
COLOR	Natural
SURFACE	TracTek®
LENGTH	9.5" 242mm
WEIGHT	9.0g
FIT TYPE	Ambidextrous
CUFF TYPE	Beaded
WATERTIGHT AQL	1.5
ORIGIN COUNTRY	China

PHYSICAL PROPERTIES

	PRE-AGING	POST-AGING
TENSILE STRENGTH:	22 MPA	20 MPA
ELONGATION:	775%	650%

INTEGRATED TECHNOLOGIES


TRAKTEK® Grip Technology: Provides a high-density pattern maximizes grip in wet or oily conditions.

* Specifications based on size Large glove

STANDARDS & CERTIFICATIONS

EN 420-2003
EN455-2000-2015
ASTM D3578
ASTM F1671-13
ASTM F739-12
REACH EU 1907/2006
EU 2016/425

CAT III COMPLEX DESIGN
UL NFPA 1999-2018
FDA 21 CFR 177.2600
Component materials comply with FDA regulations for food contact

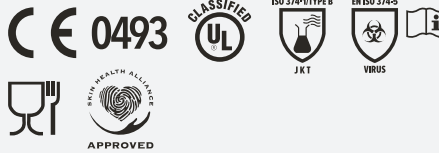

Please visit swsafety.com/symbols for information on standards used on this document.

ORDERING

ITEM NO.	SIZE	PALM WIDTH	PACKAGING
L009202	S 6½ – 7	3.3" 83mm	100 gloves per box 10 boxes per case
L009203	M 7½ – 8	3.7" 93mm	100 gloves per box 10 boxes per case
L009204	L 8½ – 9	4.3" 108mm	100 gloves per box 10 boxes per case
L009205	XL 9½ – 10	4.7" 119mm	100 gloves per box 10 boxes per case

APPLICATIONS

- Aerospace maintenance
- Assembly
- Automotive
- Chemical handling
- Inspection
- Janitorial maintenance
- Liquid handling
- Oily or wet surfaces
- Painting

Keep out of sunlight. Store in a cool, dry place. Keep away from sources of ozone or ignition.



R_L00920X1119



SW Safety Solutions Inc.
33278 Central Avenue, Unit 102, Union City, CA 94587, USA
Tel: +1.510.429.8692 | Fax: +1.510.487.5347

Trademarks and registered trademarks are the property of SW Safety Solutions Inc. and its affiliates.
©2019 SW Safety Solutions Inc. All rights reserved.

