



FEEL THE SW DIFFERENCE®

COMFORT AND DEXTERITY FOR EVERYDAY HAND PROTECTION.




TF-95NT

POWDER-FREE NATURAL LATEX GLOVES WITH TRACTEK*

HIGH-PERFORMANCE GRIP GLOVES DESIGNED TO PROVIDE BARRIER PROTECTION AGAINST CHEMICALS, PATHOGENS AND MORE FOR MAXIMIZE DEXTERITY

- TracTek® Grip Technology is engineered to maximize surface contact and channel away liquids
- Natural latex provides advanced chemical protection
- Exceeds 1.5 AQL laboratory standards

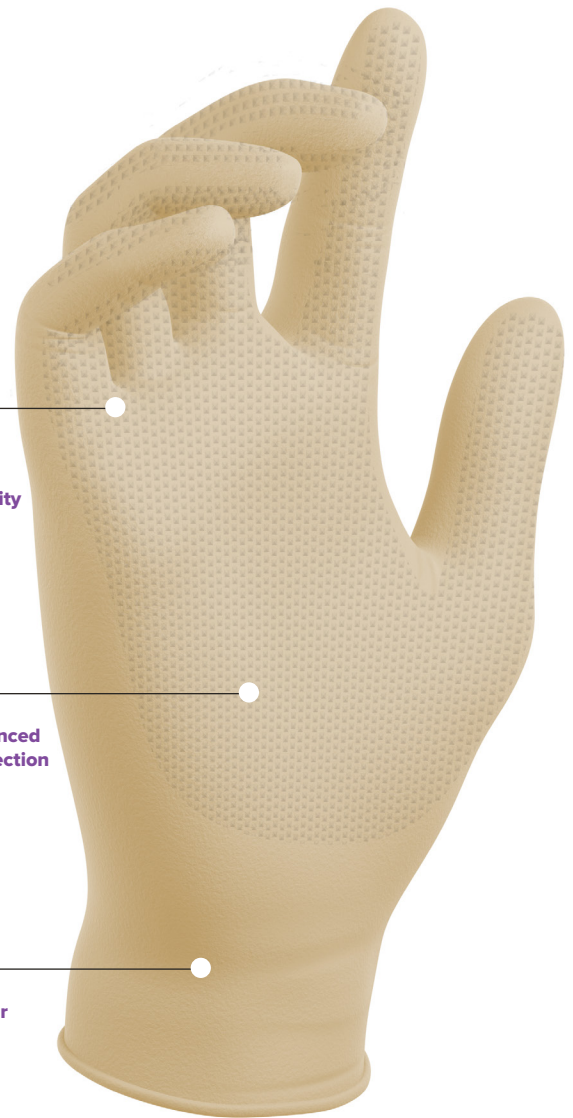

Optimal thickness for durability and tactile sensitivity

Natural latex provides advanced chemical protection

Tear-resistant beaded cuff for easy donning

TF **TF-95NT**

WEIGHT	LENGTH	THICKNESS	FEATURES	COLOR
9.0g (large size)	9.5"	6.3 mil	TracTek®	NATURAL



Feel the difference.™

SW®
33278 Central Avenue, Unit 102, Union City, CA 94587, USA
Tel: +1.510.429.8692 | Fax: +1.510.487.5347

Trademarks and registered trademarks are the property of SW and its affiliates.
©2022 SW. All rights reserved.



TECHNICAL DATA



TF-95NT POWDER-FREE NATURAL LATEX GLOVES WITH TRACTEK*



PRODUCT DESCRIPTION

SPECIFICATIONS

PRODUCT	TrueForm®
GRADE	Powder-Free Exam
MATERIAL	Latex
THICKNESS	FINGER 7.0mil 0.18mm
	PALM 6.3mil 0.16mm
	CUFF 4.9mil 0.13mm
COLOR	Natural
SURFACE	TracTek®
LENGTH	9.5" 242mm
WEIGHT	9.0g
FIT TYPE	Ambidextrous
CUFF TYPE	Beaded
WATERTIGHT AQL	1.5
ORIGIN COUNTRY	China

PHYSICAL PROPERTIES

	PRE-AGING	POST-AGING
TENSILE STRENGTH:	22 MPA	20 MPA
ELONGATION:	775%	650%

INTEGRATED TECHNOLOGIES

TRACTEK Grip Technology: Provides a high-density pattern maximizes grip in wet or oily conditions.

* Specifications based on size Large glove

STANDARDS & CERTIFICATIONS

EN ISO 21420:2020
EN 455-2000-2015
ASTM D3578-19
ASTM F1671-13
ASTM F739-12
Reach EU 1907/2006
EU 2016/425

CAT III Complex Design
UL NFPA 1999-2018
FDA 21 CFR 177.2600



Please visit swsafety.com/symbols for information on standards used on this document.

ORDERING

ITEM NO.	SIZE	PALM WIDTH	PACKAGING
L009202	S 6½ – 7	3.3" 83mm	100 gloves per box 10 boxes per case
L009203	M 7½ – 8	3.7" 93mm	100 gloves per box 10 boxes per case
L009204	L 8½ – 9	4.3" 108mm	100 gloves per box 10 boxes per case
L009205	XL 9½ – 10	4.7" 119mm	100 gloves per box 10 boxes per case

APPLICATIONS

- INDUSTRIAL**
- Aerospace maintenance
 - Assembly
 - Automotive
 - Inspection
 - Janitorial maintenance
 - Oily or wet surfaces
 - Painting
- MEDICAL**
- Chemical handling
 - Liquid handling

Keep out of sunlight. Store in a cool, dry place.
Keep away from sources of ozone or ignition.



R_L00920X1121



SW®
33278 Central Avenue, Unit 102, Union City, CA 94587, USA
Tel: +1.510.429.8692 | Fax: +1.510.487.5347
Trademarks and registered trademarks are the property of SW and its affiliates.
©2022 SW. All rights reserved.



*Under test method ASTM D5526-12, a standard test method for determining anaerobic biodegradation of plastics in accelerated landfill conditions. Current biodegradation results do not predict future results.