



FEEL THE SW DIFFERENCE®

# DURABILITY THAT'S ON CALL FOR THE TOUGHEST OF JOBS.



**MM-11BK**

POWDER-FREE ECOTEK® BIODEGRADABLE EXAMINATION GLOVES WITH DRITEK®\*

(Megaman®)

## SWEAT MANAGEMENT AND ANSI LEVEL 3 ABRASION RESISTANCE FOR THE ULTIMATE IN COMFORT AND PERFORMANCE

- DriTek® Comfort Technology with absorbent lining wicks away moisture for all day comfort
- EcoTek® Biodegradability Technology accelerates landfill breakdown without any performance loss\*
- ANSI/EN Level 3 abrasion resistance for durability and extended wear
- Fully textured surface for excellent grip
- 1.5 AQL exceeds laboratory standards
- Up to 3x longer lasting than standard nitrile gloves
- SHA Dermatologically Approved



ANSI Level 3  
Abrasion resistance

Fully textured  
surface for wet  
and dry grip

Tear-resistant  
beaded cuff for  
easy donning

<b>MM</b>		<b>MM-11BK</b>			<b>ECOTEK</b>
<b>WEIGHT</b>	<b>LENGTH</b>	<b>THICKNESS</b>	<b>FEATURES</b>	<b>COLOR</b>	
12.8g (large size)	11"	8.5 mil	DriTek® EcoTek®	BLACK	

DriTek® EcoTek®



SW®  
33278 Central Avenue, Unit 102, Union City, CA 94587, USA  
Tel: +1.510.429.8692 | Fax: +1.510.487.5347

Trademarks and registered trademarks are the property of SW® and its affiliates.  
©2021 SW®. All rights reserved.



# TECHNICAL DATA



**MM-11BK**  
**POWDER-FREE ECOTEK® BIODEGRADABLE**  
**EXAMINATION GLOVES WITH DRITEK®\***  
*(Megaman®)*



## PRODUCT DESCRIPTION

### SPECIFICATIONS

<b>PRODUCT</b>	MegaMan
<b>GRADE</b>	Powder-Free Exam
<b>MATERIAL</b>	Nitrile
<b>THICKNESS FINGER</b>	10.1mil 0.26mm
<b>PALM</b>	8.5mil 0.22mm
<b>CUFF</b>	7.0mil 0.18mm
<b>COLOR</b>	Black
<b>SURFACE OUTER</b>	Fully Textured
<b>INNER</b>	DriTek®
<b>LENGTH</b>	11" 280mm
<b>WEIGHT</b>	12.8g
<b>FIT TYPE</b>	Ambidextrous
<b>CUFF TYPE</b>	Beaded
<b>WATERTIGHT AQL</b>	1.5
<b>ORIGIN COUNTRY</b>	China

### PHYSICAL PROPERTIES

	PRE-AGING	POST-AGING
<b>TENSILE STRENGTH:</b>	17 MPa	16 MPa
<b>ELONGATION:</b>	560%	520%

### INTEGRATED TECHNOLOGIES

**DRITEK®** Comfort Technology: Advanced flock lining is a powder-free, soft cotton-like nitrile glove lining that wicks away moisture for added comfort in extended use.


**ECOTEK®** Biodegradability Technology: 92.6% biodegradable in 2.5 years. ASTM D5526-12 test results do not predict future biodegradation.\*

100% Air Inspected

\* Specifications based on size Large glove

## STANDARDS & CERTIFICATIONS

EN 420:2003      FDA 21 CFR 177.2600  
 REACH EU 1907/2006      Component materials  
 EU 2016/425      comply with FDA  
 ANSI/ISEA 105-2016      regulations for food  
 CAT III COMPLEX DESIGN      contact

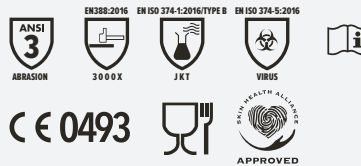

Please visit [swsafety.com/symbols](http://swsafety.com/symbols) for information on standards used on this document.

## ORDERING

ITEM NO.	SIZE	PALM WIDTH	PACKAGING
N260881	XS 5½ – 6	3.0" 76mm	50 gloves per box 10 boxes per case
N260882	S 6½ – 7	3.4" 87mm	50 gloves per box 10 boxes per case
N260883	M 7½ – 8	3.8" 97mm	50 gloves per box 10 boxes per case
N260884	L 8½ – 9	4.3" 109mm	50 gloves per box 10 boxes per case
N260885	XL 9½ – 10	4.5" 114mm	50 gloves per box 10 boxes per case
N260886	2XL 10½ – 11	4.9" 125mm	50 gloves per box 10 boxes per case
N260887	3XL 11½ – 12	5.3" 134mm	50 gloves per box 10 boxes per case

## APPLICATIONS

- Assembly
- Chemical Handling
- Fabrication
- Janitorial Maintenance
- Light Machining Operations
- Maintenance
- Waste Management

Keep out of sunlight. Store in a cool, dry place.  
 Keep away from sources of ozone or ignition.



R\_N26088X0421



SW®  
 33278 Central Avenue, Unit 102, Union City, CA 94587, USA  
 Tel: +1.510.429.8692 | Fax: +1.510.487.5347

Trademarks and registered trademarks are the property of SW® and its affiliates.  
 ©2021 SW®. All rights reserved.



\*Under test method ASTM D5526-12, a standard test method for determining anaerobic biodegradation of plastics in accelerated landfill conditions. Current biodegradation results do not predict future results.